


# C3M0060065D

## Silicon Carbide Power MOSFET C3M™ MOSFET Technology N-Channel Enhancement Mode

### Features

- 3<sup>rd</sup> Generation SiC MOSFET technology
- High blocking voltage with low on-resistance
- High speed switching with low capacitances
- Fast intrinsic diode with low reverse recovery ( $Q_{rr}$ )
- Halogen free, RoHS compliant



Wolfspeed, Inc. is in the process of rebranding its products and related materials pursuant to the entity name change from Cree, Inc. to Wolfspeed, Inc. During this transition period, products received may be marked with either the Cree name and/or logo or the Wolfspeed name and/or logo.

Ordering Part Number	Package	Marking
C3M0060065D	TO 247-3	C3M0060065D

### Typical Applications

- EV charging
- Server power supplies
- Solar PV inverters
- UPS
- DC/DC converters

### Benefits

- Higher system efficiency
- Reduced cooling requirements
- Increased power density
- Increased system switching frequency
- Easy to parallel and simple to drive
- Enable new hard switching PFC topologies (Totem-Pole)

### Key Parameters

Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions	Note
Drain - Source Voltage	$V_{DS}$			650	V	$T_c = 25^\circ\text{C}$	
Maximum Gate - Source Voltage	$V_{GS(max)}$	-8		+19		Transient	
Operational Gate-Source Voltage	$V_{GS op}$		-4/15			Static	Note 1
DC Continuous Drain Current	$I_D$			29	A	$V_{GS} = 15\text{ V}, T_c = 25^\circ\text{C}, T_J \leq 175^\circ\text{C}$	Fig. 19
				20		$V_{GS} = 15\text{ V}, T_c = 100^\circ\text{C}, T_J \leq 175^\circ\text{C}$	Note 2
Pulsed Drain Current	$I_{DM}$			99		$t_{Pmax}$ limited by $T_{Jmax}$ $V_{GS} = 15\text{ V}, T_c = 25^\circ\text{C}$	Fig. 22
Power Dissipation	$P_D$			150	W	$T_c = 25^\circ\text{C}, T_J = 175^\circ\text{C}$	Fig. 20
Operating Junction and Storage Temperature	$T_J, T_{stg}$			-40 to +175	$^\circ\text{C}$		
Solder Temperature	$T_L$			260		According to JEDEC J-STD-020	
Mounting Torque	$M_D$			1 8.8	Nm lbf-in	M3 or 6-32 screw	

Note (1): Recommended turn-on gate voltage is 15V with  $\pm 5\%$  regulation tolerance, see Application Note PRD-04814 for additional details

Note (2): Verified by design



## Electrical Characteristics ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	Note
Gate Threshold Voltage	$V_{GS(th)}$	1.8	2.3	3.6	V	$V_{DS} = V_{GS}, I_D = 5 \text{ mA}$	Fig. 11
		—	1.9	—		$V_{DS} = V_{GS}, I_D = 5 \text{ mA}, T_J = 175^\circ\text{C}$	
Zero Gate Voltage Drain Current	$I_{DSS}$	—	1	50	$\mu\text{A}$	$V_{DS} = 650 \text{ V}, V_{GS} = 0 \text{ V}$	
Gate-Source Leakage Current	$I_{GSS}$	—	10	250	nA	$V_{GS} = 15 \text{ V}, V_{DS} = 0 \text{ V}$	
Drain-Source On-State Resistance	$R_{DS(on)}$	42	60	79	m $\Omega$	$V_{GS} = 15 \text{ V}, I_D = 13.2 \text{ A}$	Fig. 4, 5, 6
		—	80	—		$V_{GS} = 15 \text{ V}, I_D = 13.2 \text{ A}, T_J = 175^\circ\text{C}$	
Transconductance	$g_{fs}$	—	10	—	S	$V_{DS} = 20 \text{ V}, I_{DS} = 13.2 \text{ A}$	Fig. 7
			9			$V_{DS} = 20 \text{ V}, I_{DS} = 13.2 \text{ A}, T_J = 175^\circ\text{C}$	
Input Capacitance	$C_{iss}$	—	1020	—	pF	$V_{GS} = 0 \text{ V}, V_{DS} = 600 \text{ V}$ $f = 1 \text{ Mhz}$ $V_{AC} = 25 \text{ mV}$	Fig. 17, 18
Output Capacitance	$C_{oss}$	—	80	—			
Reverse Transfer Capacitance	$C_{rss}$	—	9	—			
Effective Output Capacitance (Energy Related)	$C_{o(er)}$	—	95	—			
Effective Output Capacitance (Time Related)	$C_{o(tr)}$	—	132	—		$V_{GS} = 0 \text{ V}, V_{DS} = 0 \text{ V to } 400 \text{ V}$	Note 3
$C_{oss}$ Stored Energy	$E_{oss}$	—	15	—	$\mu\text{J}$	$V_{DS} = 600 \text{ V}, f = 1 \text{ Mhz}$	Fig. 16
Turn-On Switching Energy (Body Diode)	$E_{on}$	—	110	—		$V_{DS} = 400 \text{ V}, V_{GS} = -4 \text{ V/15 V}, I_D = 13.2 \text{ A},$ $R_{G(ext)} = 2.5 \Omega, L = 135 \mu\text{H}, T_J = 175^\circ\text{C}$ FWD = Internal Body Diode of MOSFET	Fig. 25
Turn Off Switching Energy (Body Diode)	$E_{off}$	—	22	—			
Turn-On Switching Energy (External Sic Diode)	$E_{on}$	—	63	—			
Turn Off Switching Energy (External Sic Diode)	$E_{off}$	—	28	—		$V_{DS} = 400 \text{ V}, V_{GS} = -4 \text{ V/15 V}, I_D = 13.2 \text{ A},$ $R_{G(ext)} = 2.5 \Omega, L = 135 \mu\text{H}, T_J = 175^\circ\text{C}$ FWD = External SiC DIODE	
Turn-On Delay Time	$t_{d(on)}$	—	9	—	ns	$V_{DD} = 400 \text{ V}, V_{GS} = -4 \text{ V/15 V}$ $I_D = 13.2 \text{ A}, R_{G(ext)} = 2.5 \Omega,$ $L = 135 \mu\text{H}$ Timing relative to $V_{DS}$ Inductive load	Fig. 26
Rise Time	$t_r$	—	20	—			
Turn-Off Delay Time	$t_{d(off)}$	—	17	—			
Fall Time	$t_f$	—	8	—			
Internal Gate Resistance	$R_{G(int)}$	—	3	—	$\Omega$	$f = 1 \text{ MHz}, V_{AC} = 25 \text{ mV}$	
Gate to Source Charge	$Q_{gs}$	—	14	—	nC	$V_{DS} = 400 \text{ V}, V_{GS} = -4 \text{ V/15 V}$ $I_D = 13.2 \text{ A}$ Per IEC60747-8-4 pg 21	Fig. 12
Gate to Drain Charge	$Q_{gd}$	—		—			
Total Gate Charge	$Q_g$	—	46	—			

Note:

<sup>3</sup>  $C_{o(er)}$ , a lumped capacitance that gives same stored energy as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 400V

$C_{o(tr)}$ , a lumped capacitance that gives same charging time as  $C_{oss}$  while  $V_{DS}$  is rising from 0 to 400V



## Reverse Diode Characteristics ( $T_c = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Typ.	Max.	Unit	Test Conditions	Notes
Diode Forward Voltage	$V_{SD}$	5.1	—	V	$V_{GS} = -4\text{ V}, I_{SD} = 6.6\text{ A}, T_J = 25^\circ\text{C}$	Fig. 8, 9, 10
		4.8	—		$V_{GS} = -4\text{ V}, I_{SD} = 6.6\text{ A}, T_J = 175^\circ\text{C}$	
Continuous Diode Forward Current	$I_S$	—	23	A	$V_{GS} = -4\text{ V}, T_c = 25^\circ\text{C}$	
Diode pulse Current	$I_{SM}$	—	99		$V_{GS} = -4\text{ V}$ , pulse width $t_p$ limited by $T_{Jmax}$	
Reverse Recovery Time	$t_{rr}$	20	—	ns	$V_{GS} = -4\text{ V}, I_{SD} = 13.2\text{ A}, V_R = 400\text{ V}$ $di_F/dt = 1200\text{ A}/\mu\text{s}, T_J = 175^\circ\text{C}$	
Reverse Recovery Charge	$Q_{rr}$	190	—	nC		
Peak Reverse Recovery Current	$I_{RRM}$	16	—	A		
Reverse Recovery Time	$t_{rr}$	29	—	ns	$V_{GS} = -4\text{ V}, I_{SD} = 13.2\text{ A}, V_R = 400\text{ V}$ $di_F/dt = 750\text{ A}/\mu\text{s}, T_J = 175^\circ\text{C}$	
Reverse Recovery Charge	$Q_{rr}$	181	—	nC		
Peak Reverse Recovery Current	$I_{RRM}$	9	—	A		

## Thermal Characteristics


Parameter	Symbol	Typ.	Unit	Note
Thermal Resistance from Junction to Case	$R_{\theta JC}$	0.99	$^\circ\text{C}/\text{W}$	Fig. 21
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	40		




## Typical Performance

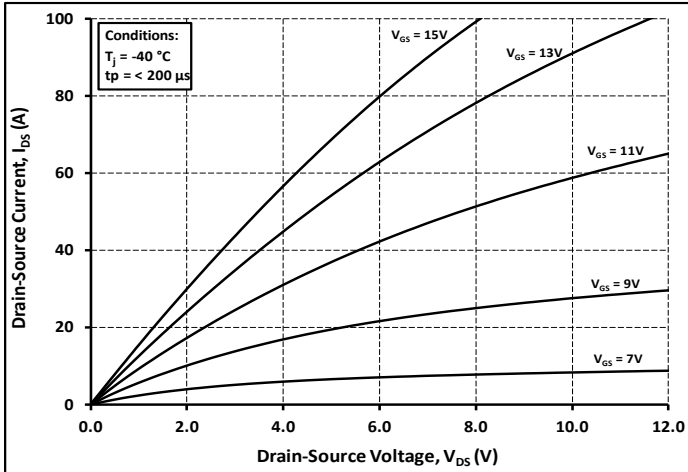


**Figure 1.** Output Characteristics  $T_j = -40^\circ\text{C}$

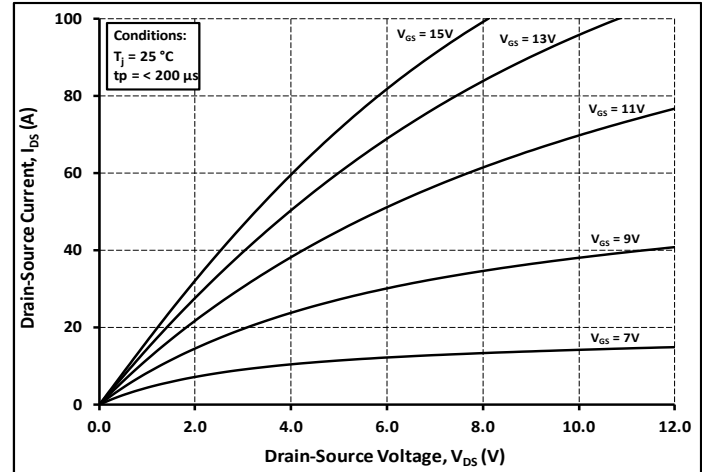


**Figure 2.** Output Characteristics  $T_j = 25^\circ\text{C}$

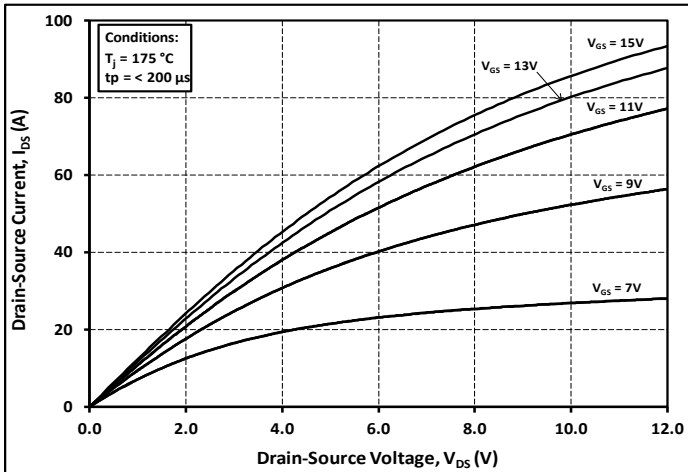


**Figure 3.** Output Characteristics  $T_j = 175^\circ\text{C}$

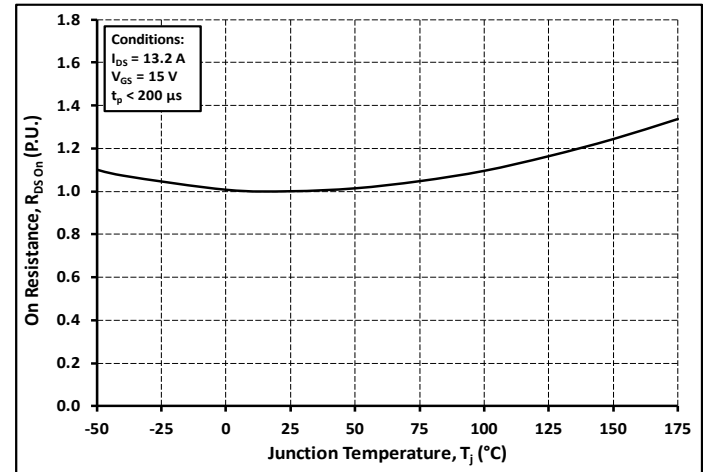

**Figure 4.** Normalized On-Resistance vs. Temperature

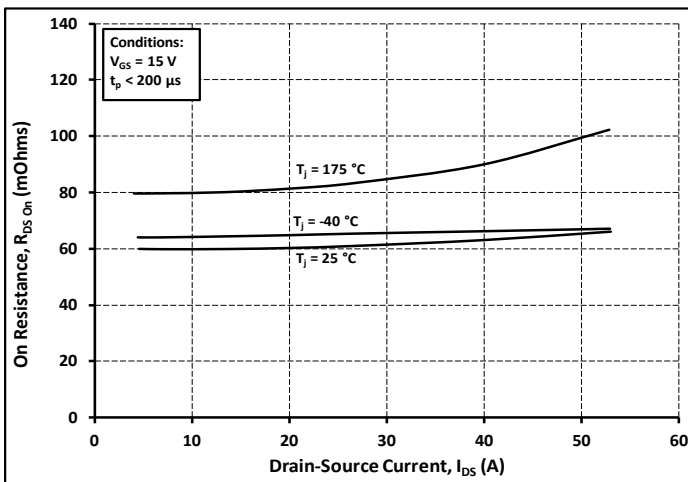


**Figure 5.** On-Resistance vs. Drain Current For Various Temperatures

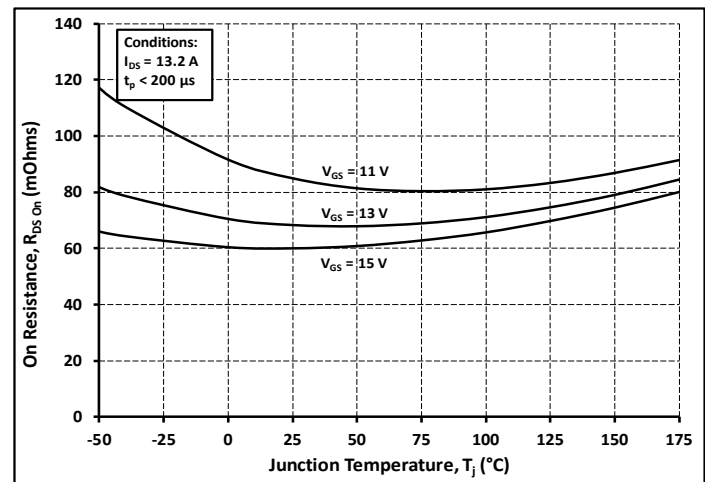


**Figure 6.** On-Resistance vs. Temperature For Various Gate Voltage


## Typical Performance

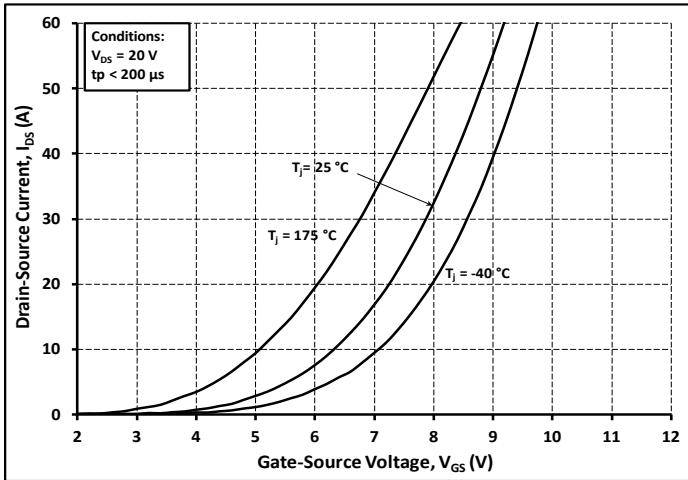


**Figure 7.** Transfer Characteristic for Various Junction Temperatures

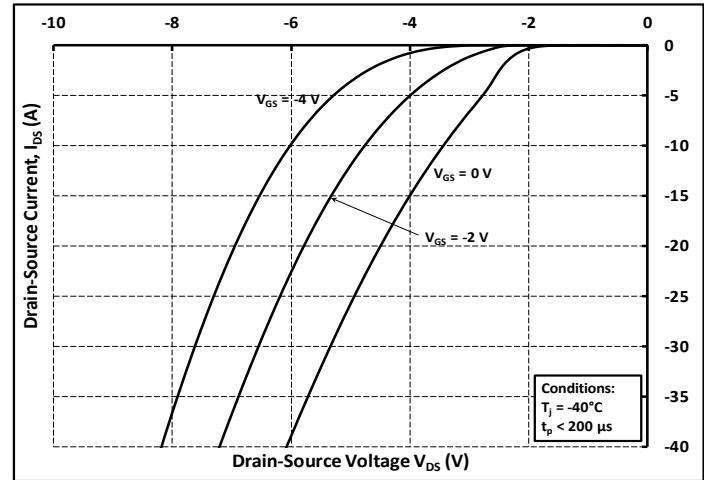


**Figure 8.** Body Diode Characteristic at  $-40\text{ }^{\circ}\text{C}$

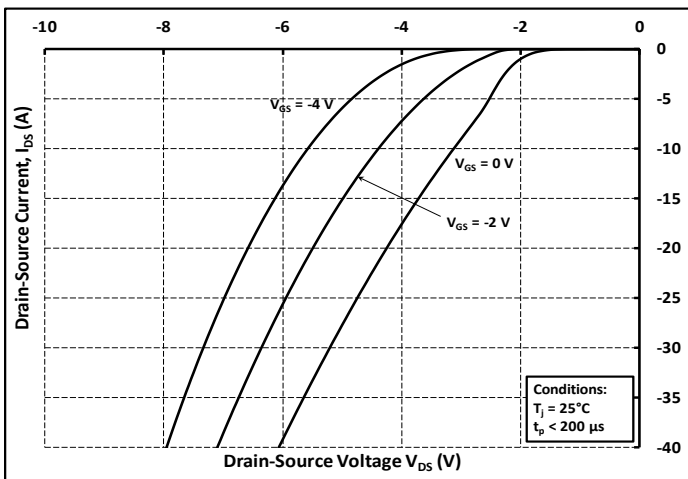


**Figure 9.** Body Diode Characteristic at  $25\text{ }^{\circ}\text{C}$

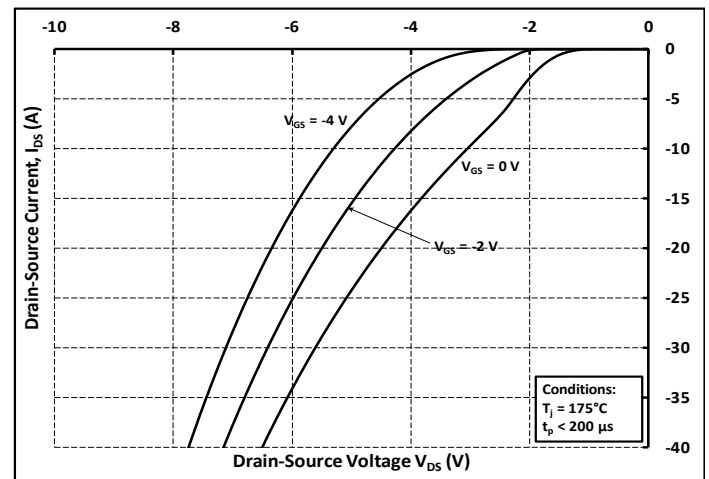

**Figure 10.** Body Diode Characteristic at  $175\text{ }^{\circ}\text{C}$

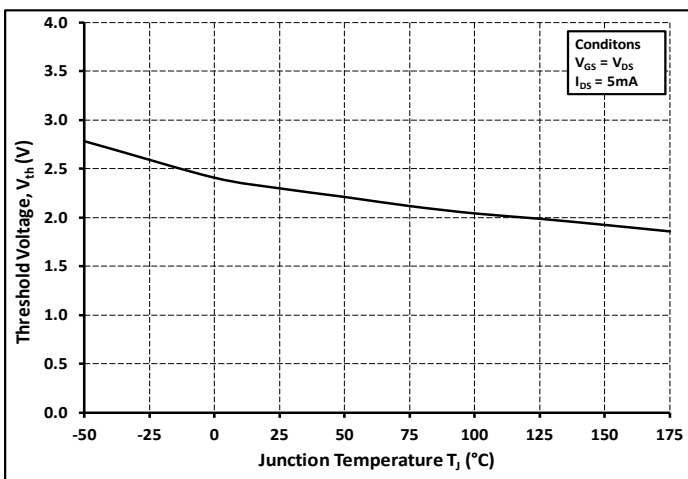


**Figure 11.** Threshold Voltage vs. Temperature

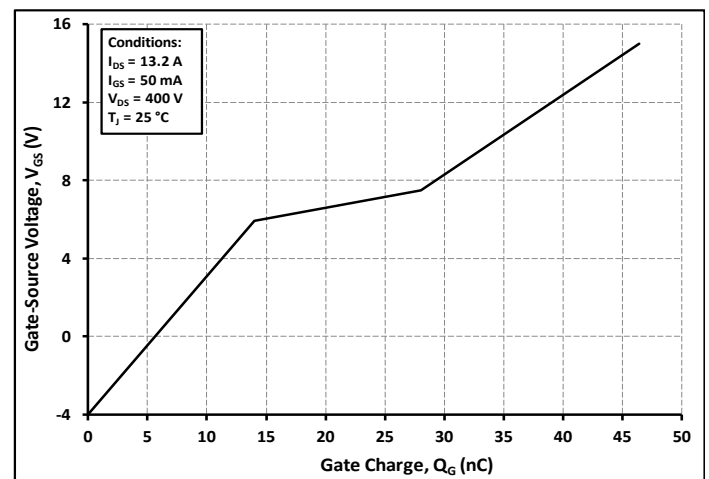


**Figure 12.** Gate Charge Characteristics


## Typical Performance

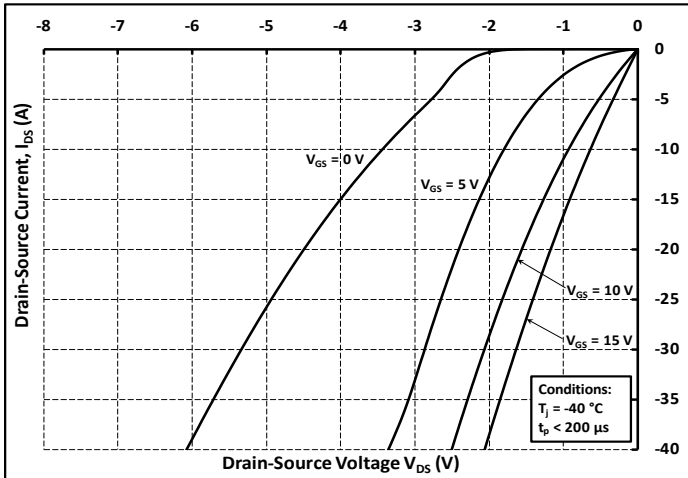


**Figure 13.** 3rd Quadrant Characteristic at -40°C

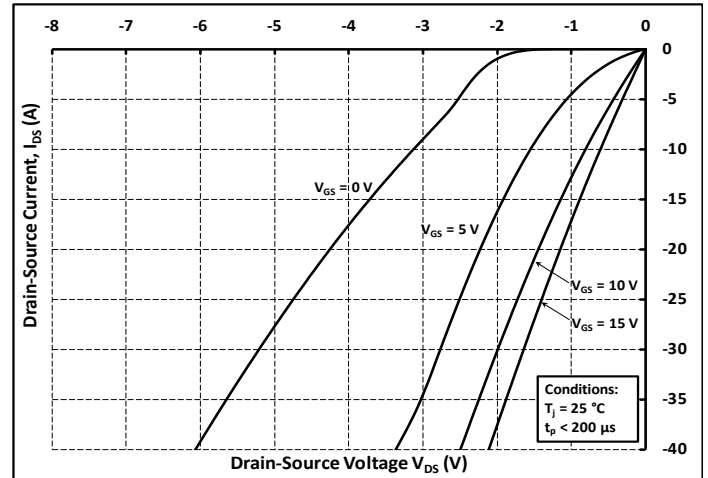


**Figure 14.** 3rd Quadrant Characteristic at 25°C

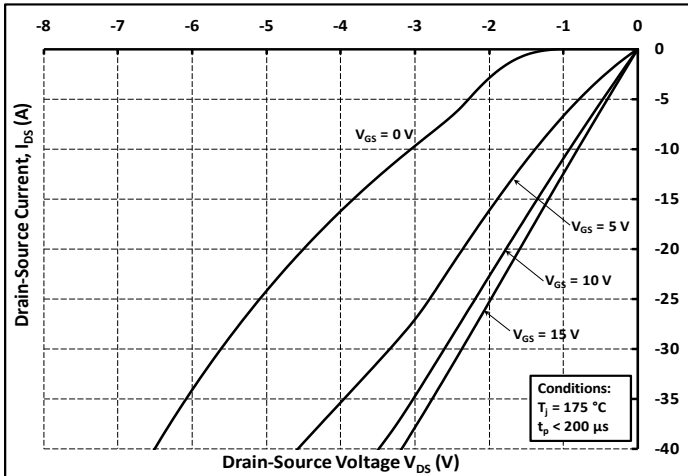


**Figure 15.** 3rd Quadrant Characteristic at 175°C

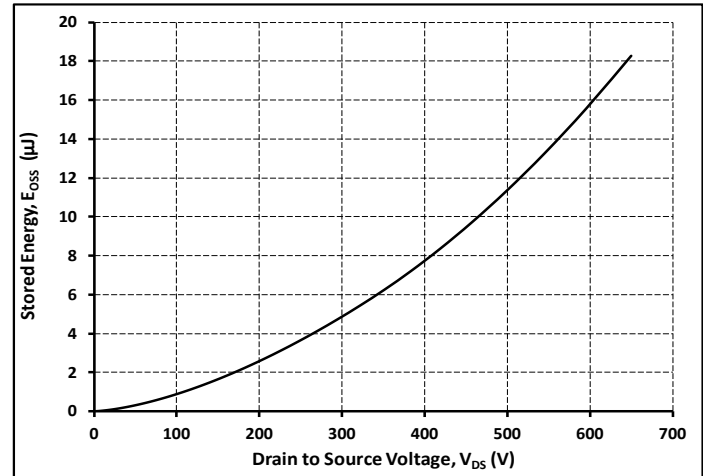

**Figure 16.** Output Capacitor Stored Energy

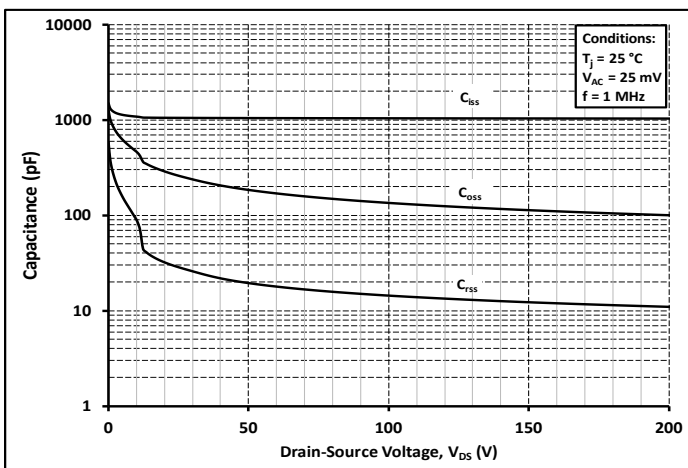


**Figure 17.** Capacitances vs. Drain-Source Voltage (0 - 200V)

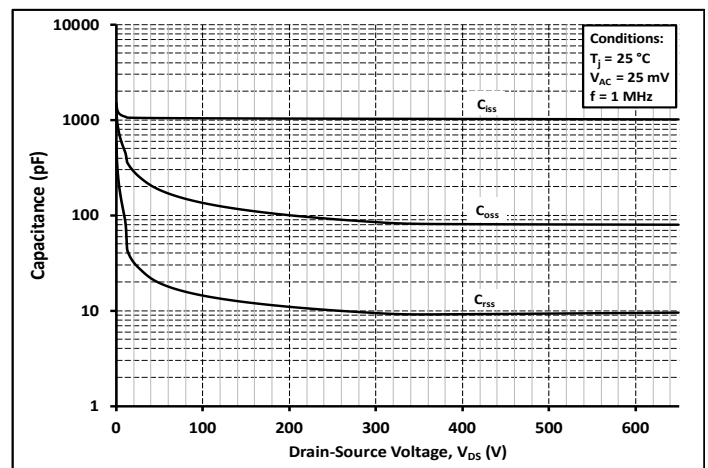


**Figure 18.** Capacitances vs. Drain-Source Voltage (0 - 650V)


## Typical Performance

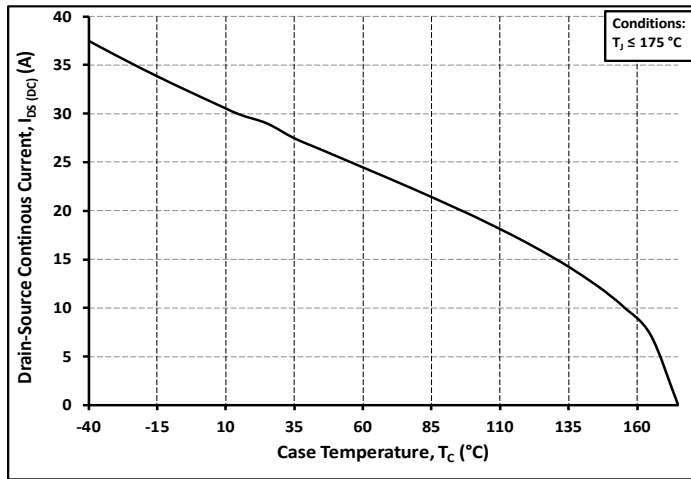


**Figure 19.** Continuous Drain Current Derating vs. Case Temperature

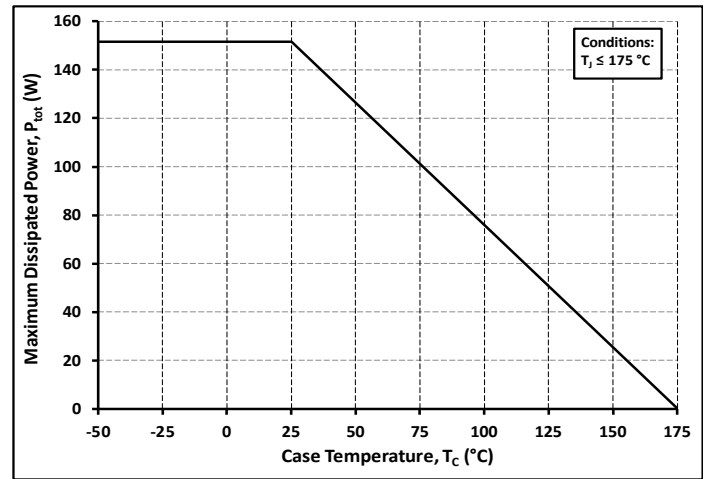


**Figure 20.** Maximum Power Dissipation Derating vs. Case Temperature

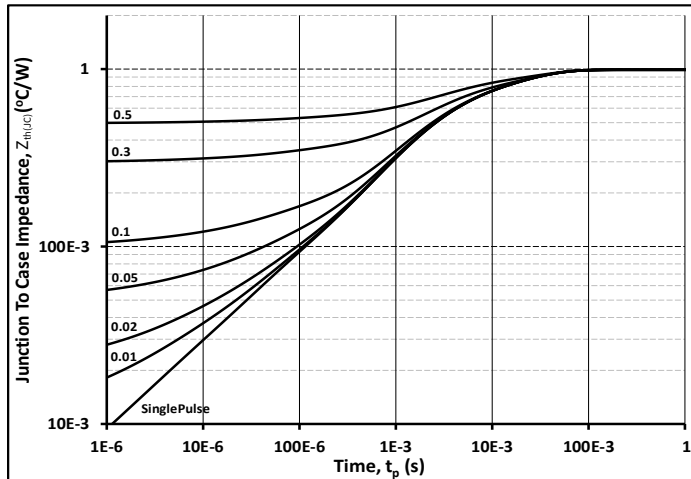


**Figure 21.** Transient Thermal Impedance (Junction - Case)

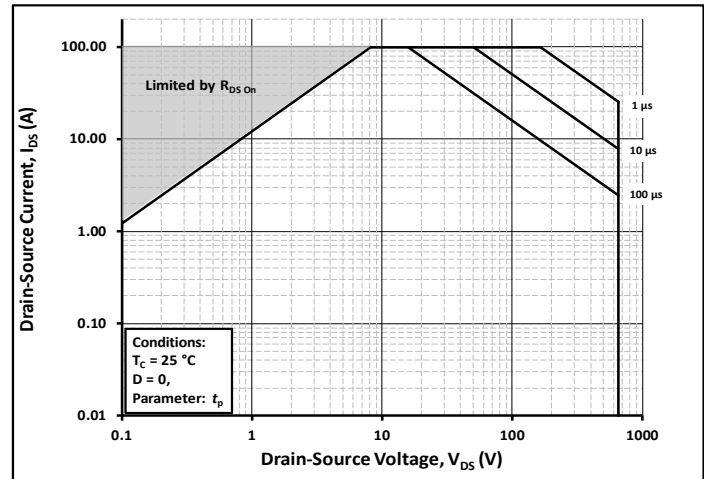

**Figure 22.** Safe Operating Area

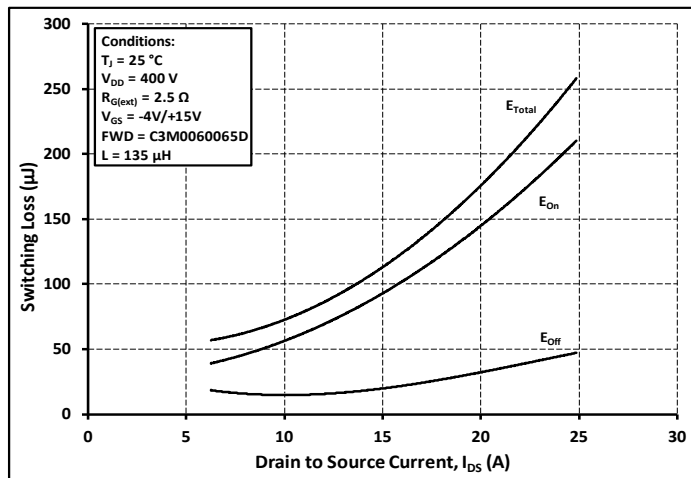

**Figure 23.** Clamped Inductive Switching Energy vs. Drain Current ( $V_{DD} = 400V$ )

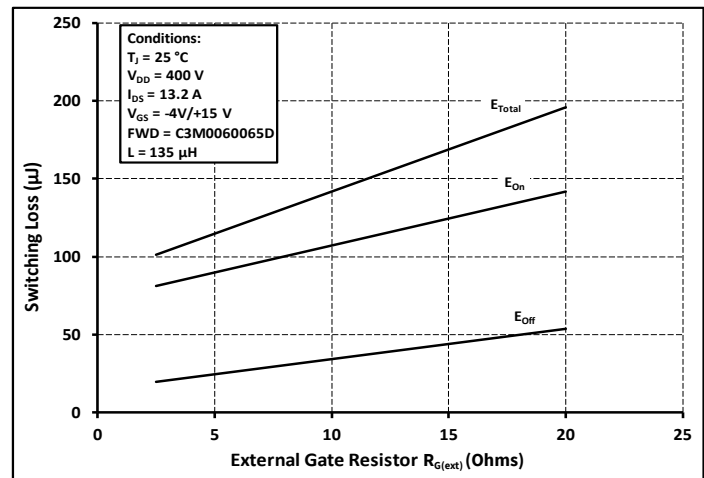

**Figure 24.** Clamped Inductive Switching Energy vs.  $R_{G(ext)}$



Typical Performance

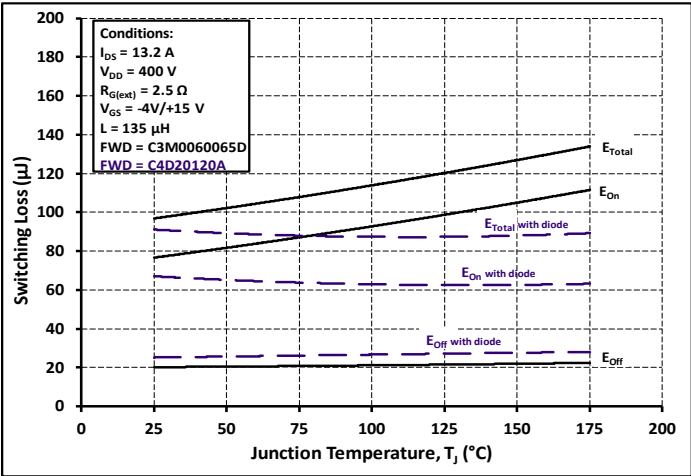


Figure 25. Clamped Inductive Switching Energy vs. Temperature


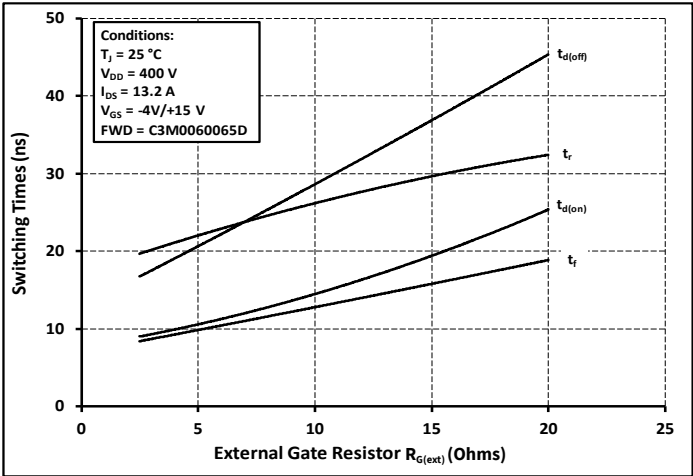



Figure 26. Switching Times vs.  $R_{G(ext)}$



## Test Circuit Schematic

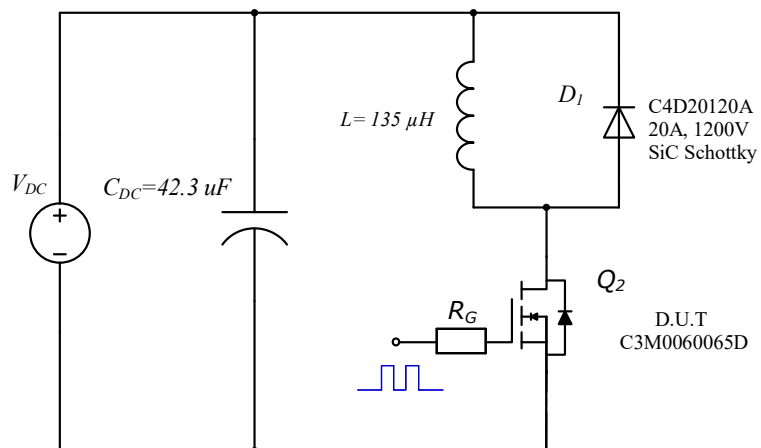


**Figure 27.** Clamped Inductive Switching Waveform Test Circuit

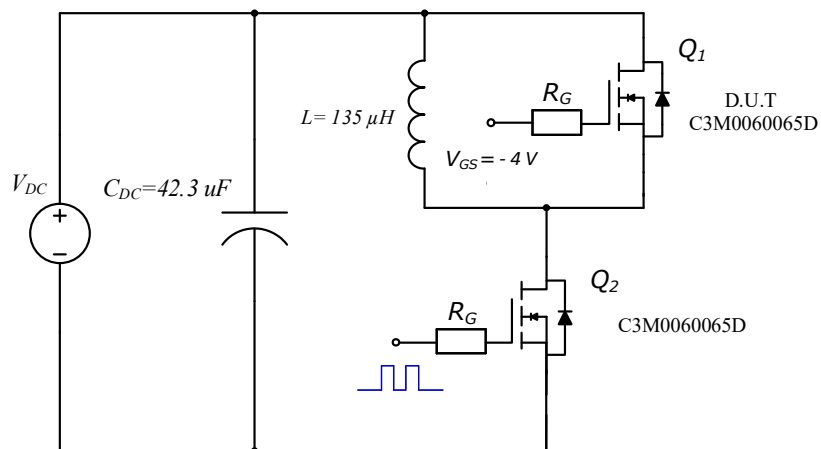


**Figure 28.** Body Diode Recovery Test Circuit

Package Dimensions – Package TO-247-3

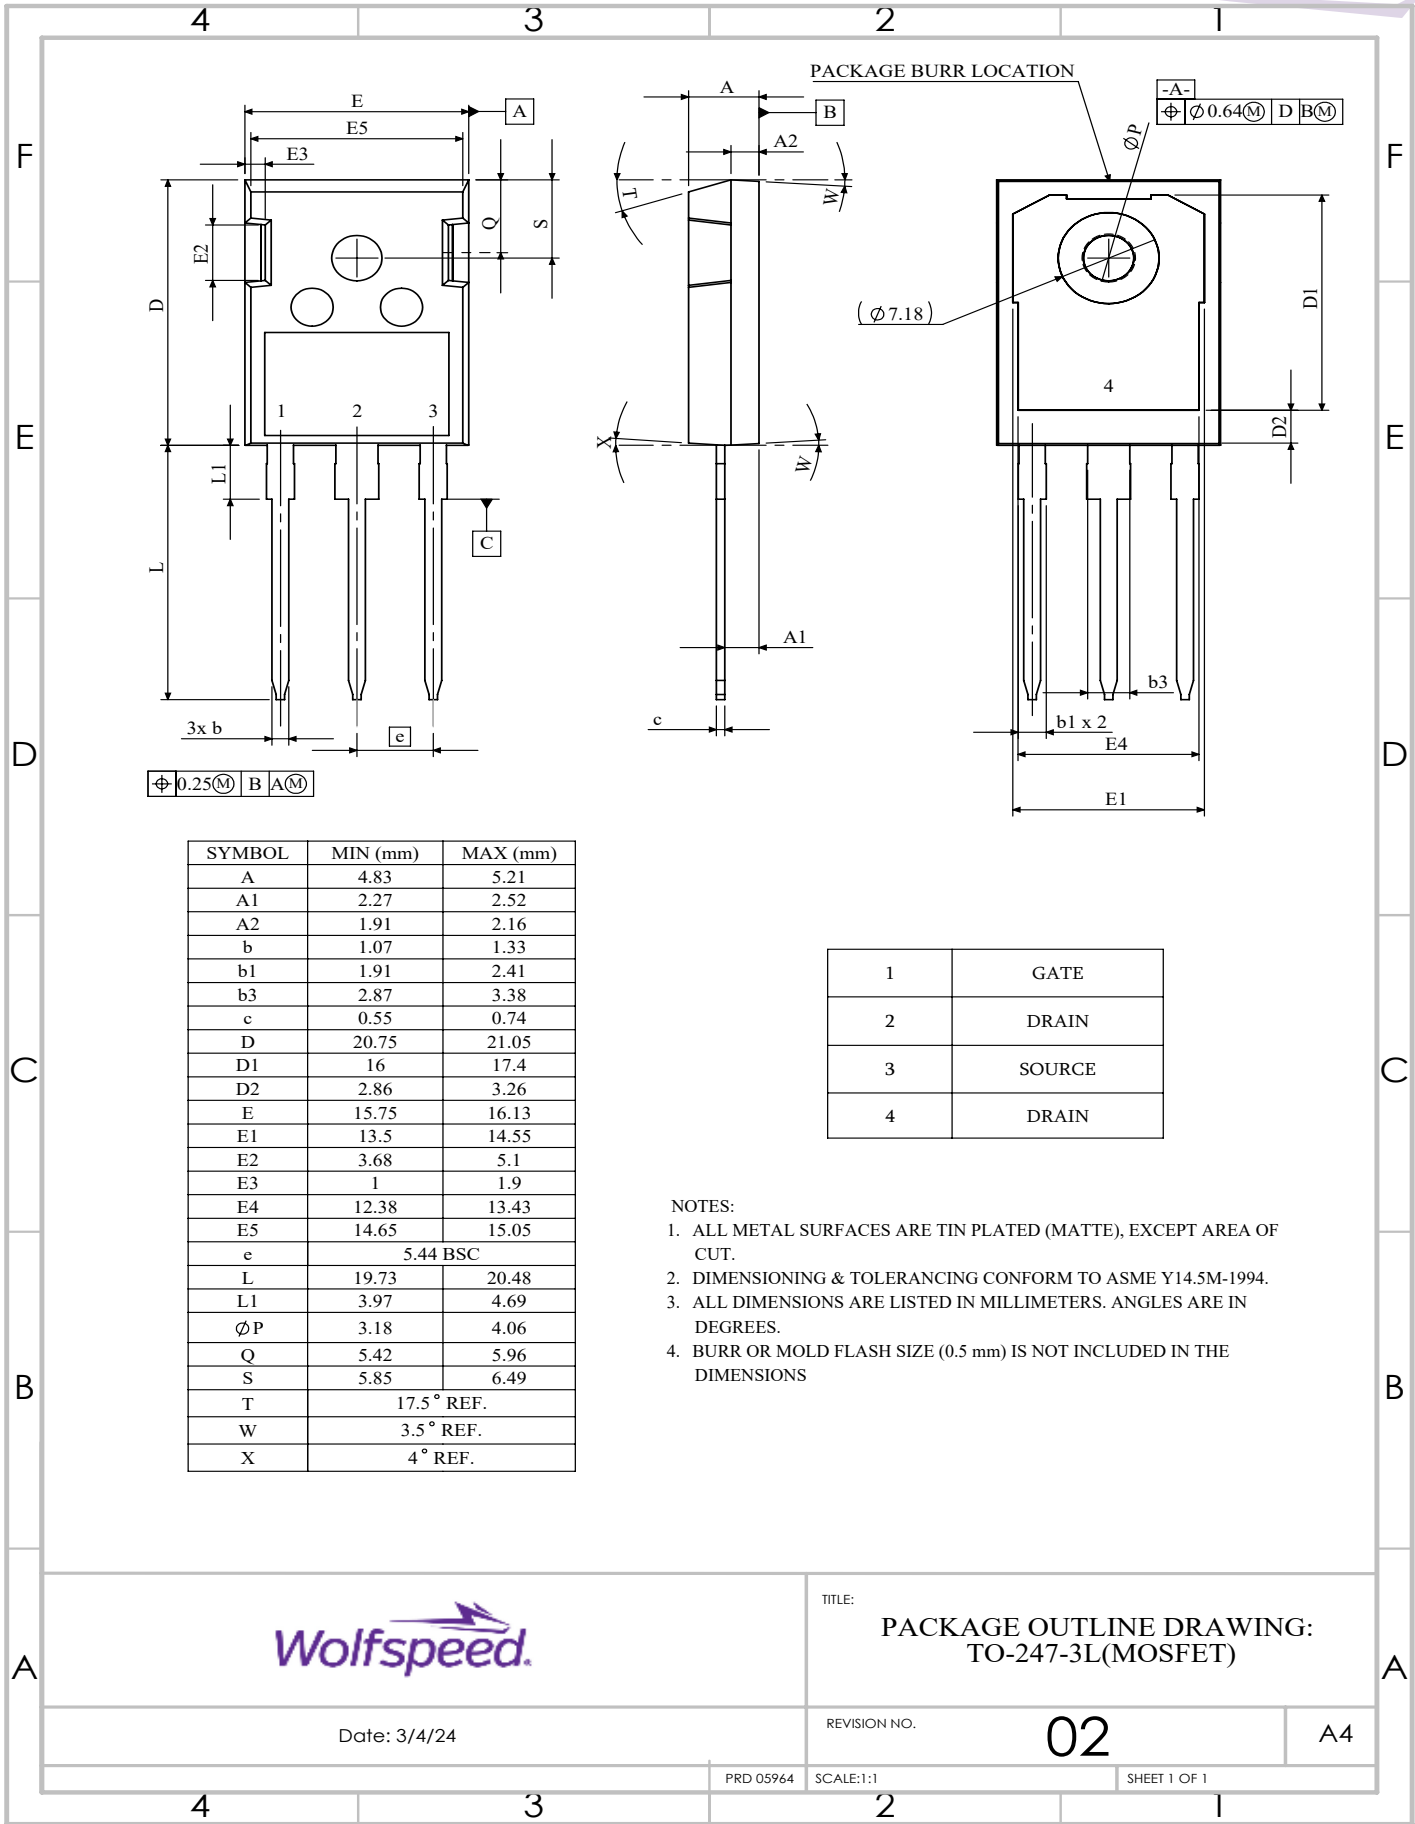

Recommended Solder Pad Layout

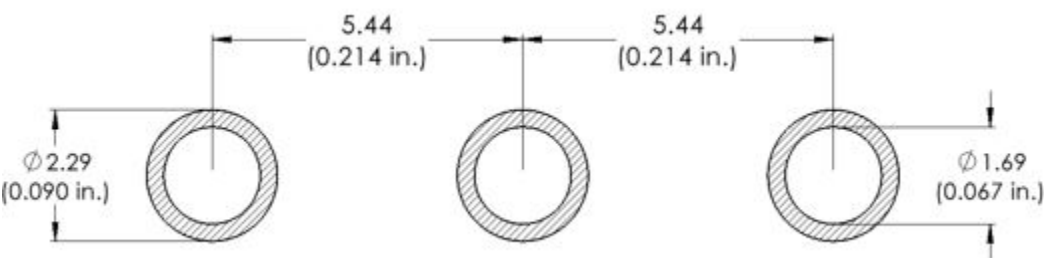

Revision History

Current Revision	Date of Release	Description of Changes
4	February-2021	N/A
5	November-2023	Not Released
6	January-2024	Updated Wolfspeed branding, package drawing, package image, and solder pad layout, added Revision History Table, Table 1 layout revised
7	September - 2024	Legal Disclaimer, POD, Diode Pulse Current Symbol

Related Links

- [SPICE Models](#)
- [SiC MOSFET Isolated Gate Driver reference design](#)
- [SiC MOSFET Evaluation Board](#)



## Notes & Disclaimer

---

WOLFSPEED PROVIDES TECHNICAL AND RELIABILITY DATA, DESIGN RESOURCES, APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT THERETO, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

The information contained in this document (excluding examples, as well as figures or values that are labeled as “typical”) constitutes Wolfspeed’s sole published specifications for the subject product. “Typical” parameters are the average values expected by Wolfspeed in large quantities and are provided for informational purposes only. Any examples provided herein have not been produced under conditions intended to replicate any specific end use. Product performance can and does vary due to a number of factors.

This product has not been designed or tested for use in, and is not intended for use in, any application in which failure of the product would reasonably be expected to cause death, personal injury, or property damage. For purposes of (but without limiting) the foregoing, this product is not designed, intended, or authorized for use as a critical component in equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment; air traffic control systems; or equipment used in the planning, construction, maintenance, or operation of nuclear facilities. Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer’s purposes, including without limitation (1) selecting the appropriate Wolfspeed products for the buyer’s application, (2) designing, validating, and testing the buyer’s application, and (3) ensuring the buyer’s application meets applicable standards and any other legal, regulatory, and safety-related requirements.

### **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of [www.wolfspeed.com](http://www.wolfspeed.com).

### **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request. SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

### **Contact info:**

4600 Silicon Drive  
Durham, NC 27703 USA  
Tel: +1.919.313.5300  
[www.wolfspeed.com/power](http://www.wolfspeed.com/power)