REVISIONS				
REV	DESCRIPTION	CHECK	APPROVAL	DATE
1.0				2020-03-12

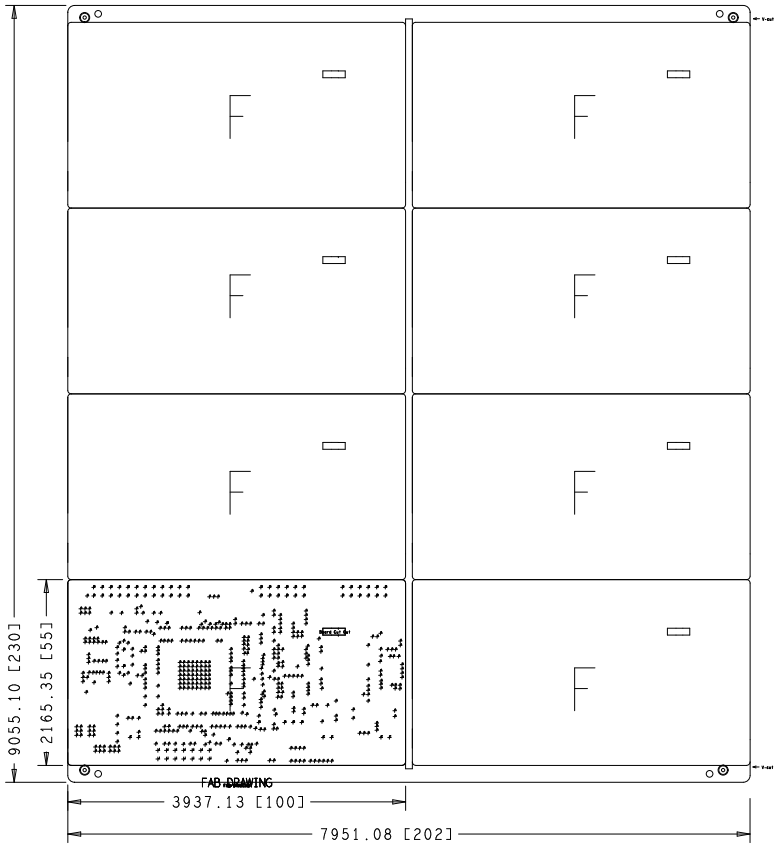

DRILL CHART: TOP to BOTTOM			
ALL UNITS ARE IN MILS			
FIGURE	SIZE	PLATED	QTY
*	12.0	PLATED	508
*	32.0	PLATED	2
*	35.0	PLATED	6
*	39.0	PLATED	48
*	40.0	PLATED	7
*	45.0	PLATED	14

REFERENCE LAYER STACKUP (Unit:mils)



GLOBAL FIDUCIAL MARK ON BREAK-AWAY





Purchase Order & Specification Sheet			
Board Name : CRD220AD12N_CRD220D12N_Control_Board	Board Thickness : 1.60mm +/- 10%	Layers :	4
Dielectric Material : FR4	Spec1 Made : 1 X 1	Board Cut Out :	Yes
Surface Finished :	Lead Free HAL		Tin Thickness: 1-40um
Solermask Colors :	Green	E-TEST Checker :	Yes
Silk Screen Colors :	White	UL-MARK :	No
Outline Profile :	Router	Gold Finger Plating:	

Fab Notes:
1. Fabricate to IPC-6012-II, current revision.
2. All vias need to be plugged.
3. Attention: the thickness of the material's adjustment should be less than 20% for each layer(Core/PP).
For instances: the thickness of Core-1 is 4mil, then the adjustment range will be 3.2-4.8mil.

hampoo	ShenZhen Hampoo Science&Technology Co.,Ltd .		
	FABRICATION DETAIL 1: 2: 3:	SIZE: A2	REV: 1.0
		UNIT: mils	SHEET:1OF1
E-MAIL: support@hampoo.com	BUSHMASTER:	DATE:	2020-03-12
TEL : 086-0755-86185000	PART NO:		
FAX : 086-0755-86185000	WEBSITE: WWW.HAMPOO.COM	SCALE: 1/1	