


CPW6-1200-Z015A

Gen 6 Silicon Carbide Schottky Diode

Description

This is the 6th generation of high voltage, high performance Z-Rec[®] silicon carbide Schottky diode in a packageless bare die format to be implemented into any custom module design. The lower forward voltage, smaller reverse leakage current, zero reverse recovery, and high thermal conductivity make this Schottky diode ideal for high frequency switching applications including high density DC to DC converters. This Schottky diode can be used in conjunction with either IGBT or MOSFET as an anti-parallel diode, or as a rectifier.

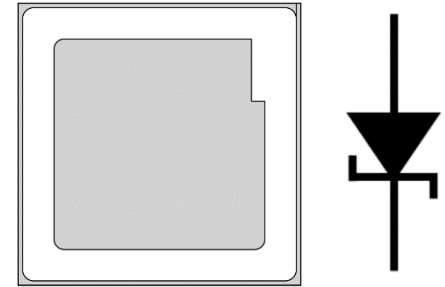

Package Type: Bare Die
Representative Image shown

Features

- Low Forward Voltage (VF) Drop with Positive Temperature Coefficient
- Zero Reverse Recovery Current / Forward Recovery Voltage
- Temperature-Independent Switching Behavior

Typical Applications

- Solar Inverters
- Motor Drives
- EV Chargers
- UPS
- Industrial Power Supplies

Absolute Maximum Ratings

Stress beyond those listed under absolute maximum ratings may damage the device.

Parameter	Symbol	Rating	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	1200	V
Continuous Forward Current	I_F	$T_c = 25^\circ\text{C}$	54
		$T_c = 125^\circ\text{C}$	29
		$T_c = 150^\circ\text{C}$	19
Repetitive Peak Forward Surge Current, assumes $t_p = 10\text{ms}$, Half Sine Wave Pulse	I_{FRM}	$T_c = 25^\circ\text{C}$	73
		$T_c = 110^\circ\text{C}$	41
Non-Repetitive Forward Surge Current, assumes $t_p = 10\text{ms}$, Half Sine Wave Pulse	I_{FSM}	$T_c = 25^\circ\text{C}$	130
		$T_c = 110^\circ\text{C}$	100
Virtual Junction and Storage Temperature	T_{VJ}, T_{stg}	-55 to +175	$^\circ\text{C}$
Maximum Processing Temperature, in non-reactive ambient	T_{proc}	325	$^\circ\text{C}$

Note: All above notation to T_c specifies case temperature from die packaged in TO-247, with $R_{th(j-c)} < 0.66^\circ\text{C/W}$



Electrical Characteristics ($T_{VJ} = 25^{\circ}\text{C}$)

Parameter	Symbol	Typ.	Max.	Unit	Test Conditions
Forward Voltage	V_f	1.3	1.8	V	$I_F = 15\text{ A}$
		1.7			$I_F = 15\text{ A}, T_{VJ} = 175^{\circ}\text{C}$
Reverse Current	I_R	4.2		μA	$V_R = 1200\text{ V}$
		25			$V_R = 1200\text{ V}, T_{VJ} = 175^{\circ}\text{C}$
Total Capacitive Charge	Q_C	90		nC	$V_R = 800\text{ V}, I_F = 15\text{ A}$
Total Capacitance	C	1517		pF	$V_R = 0\text{ V}, f = 1\text{ Mhz}$
		76			$V_R = 400\text{ V}, f = 1\text{ Mhz}$
		61			$V_R = 800\text{ V}, f = 1\text{ Mhz}$
Capacitance Stored Energy	E_C	25		μJ	$V_R = 800\text{ V}$

Thermal Characteristics

Parameter	Symbol	Typical	Unit
Thermal Resistance from Junction to Case ¹	$R_{th(j-c)}$	0.66	$^{\circ}\text{C}/\text{W}$

¹Tested in TO-247 Package

Typical Performance

All the graphs are based on a die placed in a TO-247 package.

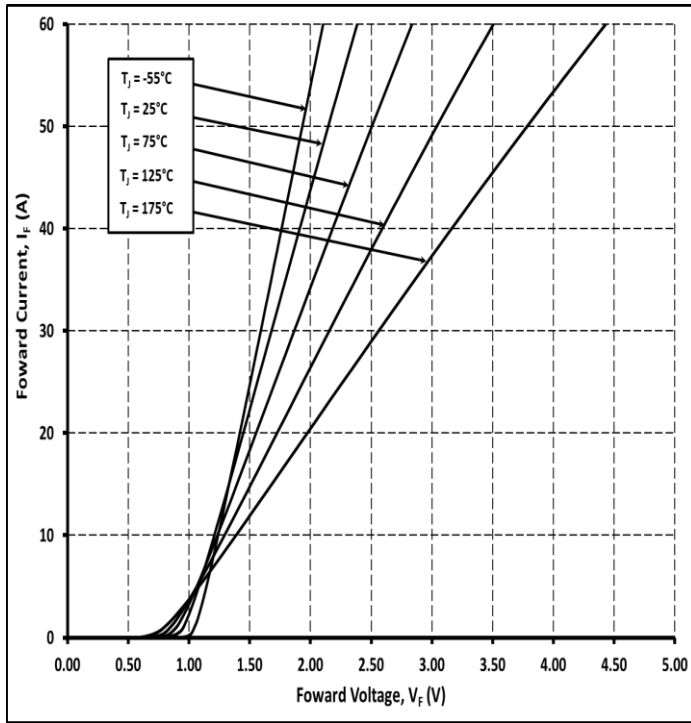


Figure 1.

Typical Forward Characteristics

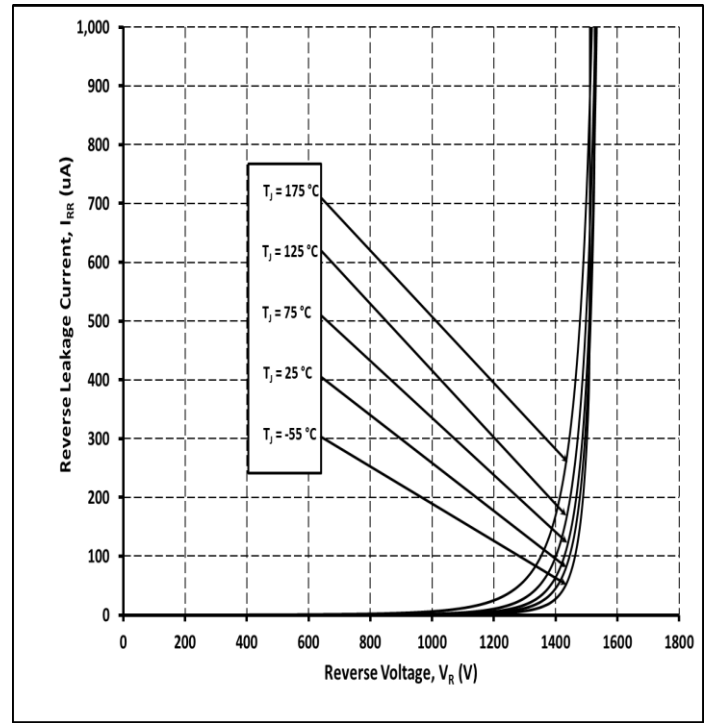


Figure 2.

Typical Reverse Characteristics

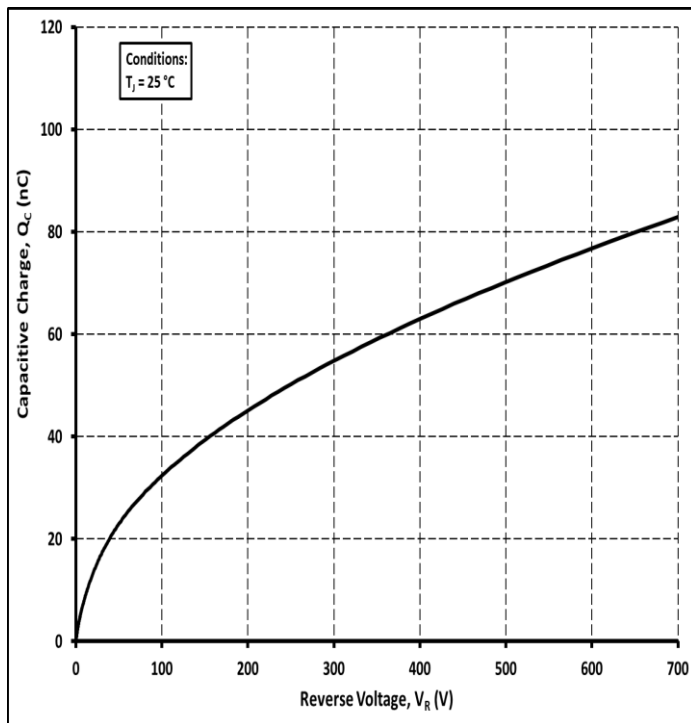


Figure 3.

Total Capacitance Charge vs Reverse Voltage

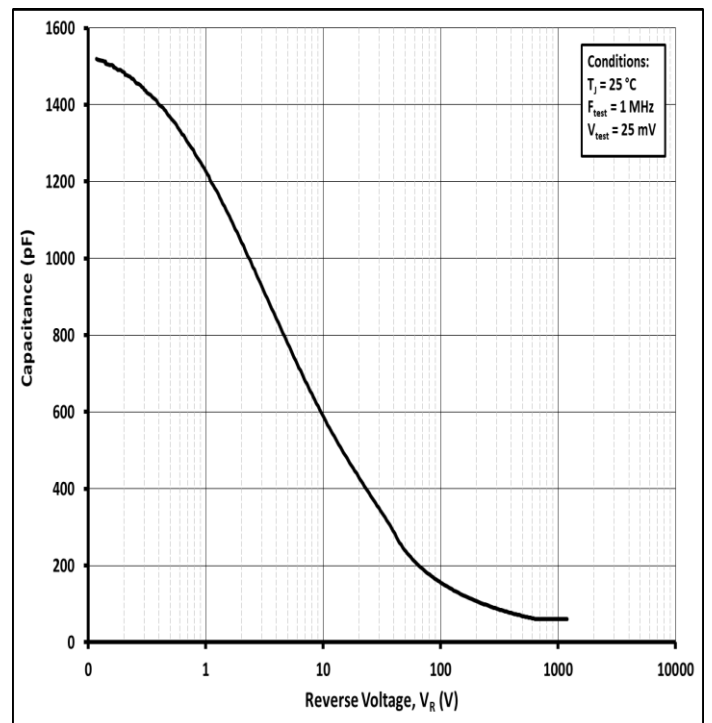


Figure 4.

Capacitance vs Reverse Voltage



Product Ordering Information

Order Number	Description	Package
CPW6-1200-Z015A-FU6	SIC DIODE G6 IND 1200V/15A FULL MLT	Bare Die Product

Revision History

Revision History	Date of Change	Brief Summary
1	8/6/2024	Initial release
2	11/5/2024	<ul style="list-style-type: none">• Updated "Typical Applications"• Updated disclaimers• Updated Titles for Figures 3 and 4



Notes & Disclaimers

WOLFSPEED PROVIDES TECHNICAL AND RELIABILITY DATA, DESIGN RESOURCES, APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT THERETO, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

The information contained in this document (excluding examples, as well as figures or values that are labeled as “typical”) constitutes Wolfspeed’s sole published specifications for the subject product. “Typical” parameters are the average values expected by Wolfspeed in large quantities and are provided for informational purposes only. Any examples provided herein have not been produced under conditions intended to replicate any specific end use. Product performance can and does vary due to a number of factors.

This product has not been designed or tested for use in, and is not intended for use in, any application in which failure of the product would reasonably be expected to cause death, personal injury, or property damage. For purposes of (but without limiting) the foregoing, this product is not designed, intended, or authorized for use as a critical component in equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment; air traffic control systems; or equipment used in the planning, construction, maintenance, or operation of nuclear facilities. Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer’s purposes, including without limitation (1) selecting the appropriate Wolfspeed products for the buyer’s application, (2) designing, validating, and testing the buyer’s application, and (3) ensuring the buyer’s application meets applicable standards and any other legal, regulatory, and safety-related requirements.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of www.wolfspeed.com.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

Contact info:

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfspeed.com/power