


# CAB500M17HM3

1700 V, 500 A, Silicon Carbide, Half-Bridge Module

|          |               |
|----------|---------------|
| $V_{DS}$ | <b>1700 V</b> |
| $I_{DS}$ | <b>500 A</b>  |

## Technical Features

- Ultra-Low Loss
- High Frequency Operation
- Zero Turn-Off Tail Current from MOSFET
- Normally-Off, Fail-Safe Device Operation



## Typical Applications

- Railway, Traction, and Motor Drives
- EV Chargers
- High-Efficiency Converters/Inverters
- Renewable Energy
- Smart-Grid/Grid-Tied Distributed Generation

## System Benefits

- Enables Compact, Lightweight Systems
- Increased System Efficiency, due to Low Switching & Conduction Losses of SiC
- Reduced Thermal Requirements and System Cost

## Key Parameters

| Parameter                            | Symbol        | Min. | Typ.   | Max. | Unit             | Conditions  | Note                     |
|--------------------------------------|---------------|------|--------|------|------------------|---|--------------------------|
| Drain-Source Voltage                 | $V_{DS}$      |      |        | 1700 | V                | $T_C = 25\text{ }^\circ\text{C}$  |                          |
| Gate-Source Voltage, Maximum Value   | $V_{GS(max)}$ | -8   |        | +19  |                  | Transient   | Note 1<br>Fig. 33        |
| Gate-Source Voltage, Recommended     | $V_{GS(op)}$  |      | -4/+15 |      |                  | Static  |                          |
| DC Continuous Drain Current          | $I_D$         |      | 653    |      | A                | $V_{GS} = 15\text{ V}, T_C = 25\text{ }^\circ\text{C}, T_{Vj} \leq 175\text{ }^\circ\text{C}$ | Notes<br>2, 3<br>Fig. 20 |
|                                      |               |      | 494    |      |                  | $V_{GS} = 15\text{ V}, T_C = 90\text{ }^\circ\text{C}, T_{Vj} \leq 175\text{ }^\circ\text{C}$ |                          |
| DC Source-Drain Current (Body Diode) | $I_{SD(BD)}$  |      | 446    |      |                  | $V_{GS} = -4\text{ V}, T_C = 25\text{ }^\circ\text{C}, T_{Vj} \leq 175\text{ }^\circ\text{C}$ |                          |
| Pulsed Drain-Source Current          | $I_{DM}$      |      | 1000   |      |                  | $t_{Pmax}$ limited by $T_{Vjmax}$<br>$V_{GS} = 15\text{ V}, T_C = 25\text{ }^\circ\text{C}$   |                          |
| Power Dissipation                    | $P_D$         |      | 2143   |      | W                | $T_C = 25\text{ }^\circ\text{C}, T_{Vj} \leq 175\text{ }^\circ\text{C}$                       | Note 4<br>Fig. 20        |
| Virtual Junction Temperature         | $T_{Vj(op)}$  | -40  |        | 175  | $^\circ\text{C}$ |   |                          |

Note (1): Recommended turn-on gate voltage is 15 V with  $\pm 5\%$  regulation tolerance

Note (2): Current limit calculated by  $I_{D(max)} = \sqrt{(P_D/R_{DS(typ)})(T_{Vj(max)} + I_{D(max)})}$

Note (3): Verified by design

Note (4):  $P_D = (T_{Vj} - T_C)/R_{TH(jc,typ)}$

## MOSFET Characteristics (Per Position) ( $T_{VJ} = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Specified)

| Parameter  | Symbol        | Min. | Typ.                 | Max. | Unit                        | Conditions   | Note               |
|--|---------------|------|----------------------|------|-----------------------------|--|--------------------|
| Drain-Source Breakdown Voltage   | $V_{(BR)DSS}$ | 1700 |                      |      |                             | $V_{GS} = 0\text{ V}, T_{VJ} = -40\text{ }^{\circ}\text{C}$  |                    |
| Gate Threshold Voltage   | $V_{GS(th)}$  | 1.8  | 2.5                  | 3.6  | V                           | $V_{DS} = V_{GS}, I_D = 203\text{ mA}$   |                    |
|  |               |      | 2.0                  |      |                             | $V_{DS} = V_{GS}, I_D = 203\text{ mA}, T_{VJ} = 175\text{ }^{\circ}\text{C}$   |                    |
| Zero Gate Voltage Drain Current  | $I_{DSS}$     |      | 8                    | 325  | $\mu\text{A}$               | $V_{GS} = 0\text{ V}, V_{DS} = 1700\text{ V}$  |                    |
| Gate-Source Leakage Current  | $I_{GSS}$     |      | 0.008                | 2    |                             | $V_{GS} = 15\text{ V}, V_{DS} = 0\text{ V}$  |                    |
| Drain-Source On-State Resistance (Devices Only)  | $R_{DS(on)}$  |      | 2.16                 | 2.60 | $\text{m}\Omega$            | $V_{GS} = 15\text{ V}, I_D = 500\text{ A}$   | Fig. 2<br>Fig. 3   |
|  |               |      | 4.97                 |      |                             | $V_{GS} = 15\text{ V}, I_D = 500\text{ A}, T_{VJ} = 175\text{ }^{\circ}\text{C}$   |                    |
| Transconductance   | $g_{fs}$      |      | 369                  |      | S                           | $V_{DS} = 20\text{ V}, I_D = 500\text{ A}$   | Fig. 4             |
|  |               |      | 374                  |      |                             | $V_{DS} = 20\text{ V}, I_D = 500\text{ A}, T_{VJ} = 175\text{ }^{\circ}\text{C}$   |                    |
| Turn-On Switching Energy, $T_{VJ} = 25\text{ }^{\circ}\text{C}$<br>$T_{VJ} = 125\text{ }^{\circ}\text{C}$<br>$T_{VJ} = 175\text{ }^{\circ}\text{C}$  | $E_{on}$      |      | 25.0<br>27.9<br>32.5 |      | $\text{mJ}$                 | $V_{DD} = 900\text{ V}$<br>$I_D = 500\text{ A},$<br>$V_{GS} = -4\text{ V}/15\text{ V},$<br>$R_{G(OFF)} = 1.5\text{ }\Omega, R_{G(ON)} = 1.5\text{ }\Omega,$<br>$L = 14\text{ }\mu\text{H}$ | Fig. 11<br>Fig. 13 |
| Turn-Off Switching Energy, $T_{VJ} = 25\text{ }^{\circ}\text{C}$<br>$T_{VJ} = 125\text{ }^{\circ}\text{C}$<br>$T_{VJ} = 175\text{ }^{\circ}\text{C}$ | $E_{off}$     |      | 15.4<br>15.4<br>15.6 |      |                             |  |                    |
| Internal Gate Resistance   | $R_{G(int)}$  |      | 0.93                 |      | $\Omega$                    | $f = 100\text{ kHz}$   |                    |
| Input Capacitance  | $C_{iss}$     |      | 64.9                 |      | $\text{nF}$                 | $V_{GS} = 0\text{ V}, V_{DS} = 1200\text{ V}$<br>$V_{AC} = 25\text{ mV}, f = 100\text{ kHz}$   | Fig. 9             |
| Output Capacitance   | $C_{oss}$     |      | 1.5                  |      |                             |  |                    |
| Reverse Transfer Capacitance   | $C_{rss}$     |      | 42                   |      | $\text{pF}$                 |  |                    |
| Gate to Source Charge  | $Q_{GS}$      |      | 640                  |      | $\text{nC}$                 | $V_{DS} = 1200\text{ V}, V_{GS} = -4\text{ V}/15\text{ V}$<br>$I_D = 735\text{ A}$<br>Per IEC60747-8-4 pg 21   |                    |
| Gate to Drain Charge   | $Q_{GD}$      |      | 560                  |      |                             |  |                    |
| Total Gate Charge  | $Q_G$         |      | 1992                 |      |                             |  |                    |
| FET Thermal Resistance, Junction to Case   | $R_{thJC}$    |      | 0.070                |      | $^{\circ}\text{C}/\text{W}$ |  | Fig. 17            |

## Diode Characteristics (Per Position) ( $T_{VJ} = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Specified)

| Parameter  | Symbol    | Min. | Typ.              | Max. | Unit          | Conditions  | Note    |
|--|-----------|------|-------------------|------|---------------|---|---------|
| Body Diode Forward Voltage   | $V_{SD}$  |      | 5.5               |      | V             | $V_{GS} = -4\text{ V}, I_{SD} = 500\text{ A}$   | Fig. 7  |
|  |           |      | 4.8               |      |               | $V_{GS} = -4\text{ V}, I_{SD} = 500\text{ A}, T_{VJ} = 175\text{ }^{\circ}\text{C}$   |         |
| Reverse Recovery Time  | $t_{RR}$  |      | 67                |      | ns            |   |         |
| Reverse Recovery Charge  | $Q_{RR}$  |      | 24                |      | $\mu\text{C}$ | $V_{GS} = -4\text{ V}, I_{SD} = 500\text{ A}, V_R = 900\text{ V}$<br>$di/dt = 13\text{ A/ns}, T_{VJ} = 175\text{ }^{\circ}\text{C}$               | Fig. 32 |
| Peak Reverse Recovery Current  | $I_{RRM}$ |      | 350               |      | A             |   |         |
| Reverse Recovery Energy, $T_{VJ} = 25\text{ }^{\circ}\text{C}$<br>$T_{VJ} = 125\text{ }^{\circ}\text{C}$<br>$T_{VJ} = 175\text{ }^{\circ}\text{C}$ | $E_{RR}$  |      | 0.6<br>3.3<br>6.3 |      | $\text{mJ}$   | $V_{DD} = 900\text{ V}, I_D = 500\text{ A},$<br>$V_{GS} = -4\text{ V}/15\text{ V}, R_{G(ON)} = 1.5\text{ }\Omega,$<br>$L = 14\text{ }\mu\text{H}$ | Fig. 14 |



### Module Physical Characteristics

| Parameter                          | Symbol             | Min.  | Typ.  | Max. | Unit | Conditions                      |
|------------------------------------|--------------------|-------|-------|------|------|---------------------------------|
| Package Resistance, M1 (High-Side) | R <sub>1-2</sub>   |       | 106.5 |      | μΩ   | T <sub>C</sub> = 125 °C, Note 5 |
| Package Resistance, M2 (Low-Side)  | R <sub>2-3</sub>   |       | 126.3 |      |      | T <sub>C</sub> = 125 °C, Note 5 |
| Stray Inductance                   | L <sub>Stray</sub> |       | 4.9   |      | nH   | Between DC- and DC+, f = 10 MHz |
| Case Temperature                   | T <sub>C</sub>     | -40   |       | 125  | °C   |                                 |
| Mounting Torque                    | M <sub>S</sub>     | 3     | 4.5   | 5    | N-m  | Baseplate, M6 Bolts             |
|                                    |                    | 0.9   | 1.1   | 1.3  |      | Power Terminals, M4 Bolts       |
| Weight                             | W                  |       | 167   |      | g    |                                 |
| Case Isolation Voltage             | V <sub>isol</sub>  | 4     |       |      | kV   | AC, 50 Hz, 1 minute             |
| Comparative Tracking Index         | CTI                | 600   |       |      |      |                                 |
| Clearance Distance                 |                    | 13.07 |       |      | mm   | Terminal to Terminal            |
|                                    |                    | 6.00  |       |      |      | Terminal to Heatsink            |
| Creepage Distance                  |                    | 14.27 |       |      |      | Terminal to Terminal            |
|                                    |                    | 12.34 |       |      |      | Terminal to Heatsink            |

Note (5): Total Effective Resistance (Per Switch Position) = MOSFET R<sub>DS(on)</sub> + Switch Position Package Resistance

### NTC Characteristics (T<sub>NTC</sub> = 25 °C Unless Otherwise Specified)

| Parameter                       | Symbol             | Min. | Typ. | Max. | Unit | Note |
|---------------------------------|--------------------|------|------|------|------|------|
| Resistance at 25 °C             | R <sub>25</sub>    |      | 4700 |      | Ω    |      |
| Tolerance of R <sub>25</sub>    |                    |      | ±1   |      | %    |      |
| Beta Value for 25 °C to 85 °C   | B <sub>25/85</sub> |      | 3435 |      | K    |      |
| Beta Value for 0 °C to 100 °C   | B <sub>0/100</sub> |      | 3399 |      | K    |      |
| Tolerance of B <sub>25/85</sub> |                    |      | ±1   |      | %    |      |
| Maximum Power Dissipation       | P <sub>Max</sub>   |      | 50   |      | mW   |      |

### Steinhart & Hart Coefficients for NTC Resistance & NTC Temperature Computation (T in K)

$$\ln\left(\frac{R}{R_{25}}\right) = A + \frac{B}{T} + \frac{C}{T^2} + \frac{D}{T^3}$$

$$\frac{1}{T} = A_1 + B_1 \ln\left(\frac{R}{R_{25}}\right) + C_1 \ln^2\left(\frac{R}{R_{25}}\right) + D_1 \ln^3\left(\frac{R}{R_{25}}\right)$$

| A          | B         | C          | D          |
|------------|-----------|------------|------------|
| -1.289E+01 | 4.245E+03 | -8.749E+04 | -9.588E+06 |

| A <sub>1</sub> | B <sub>1</sub> | C <sub>1</sub> | D <sub>1</sub> |
|----------------|----------------|----------------|----------------|
| 3.354E-03      | 3.001E-04      | 5.085E-06      | 2.188E-07      |



Typical Performance

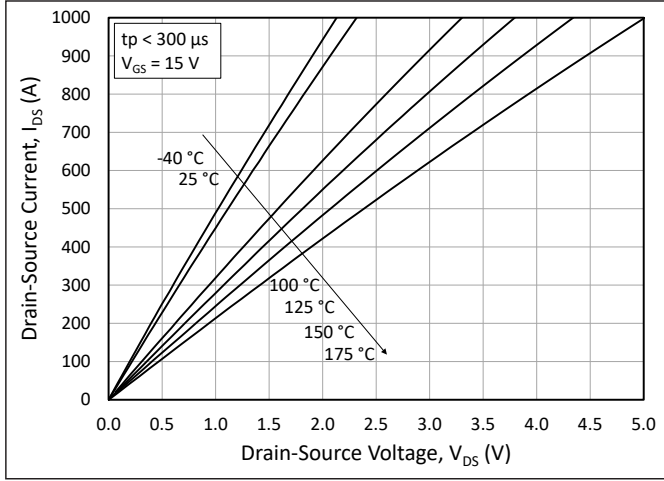


Figure 1. Output Characteristics for Various Junction Temperatures

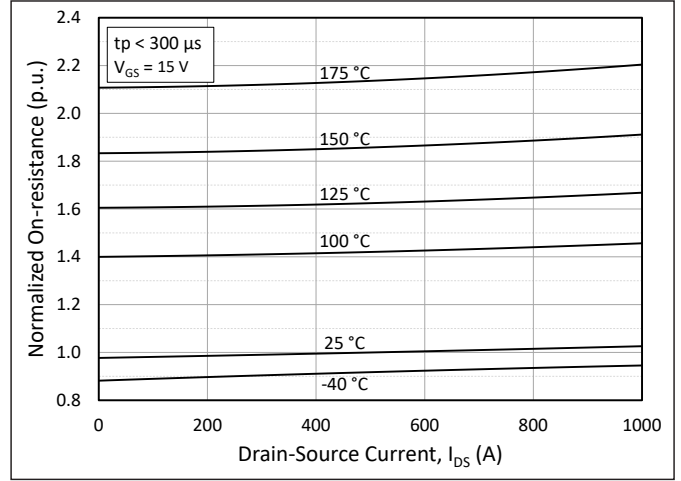


Figure 2. Normalized On-State Resistance vs. Drain Current for Various Junction Temperatures

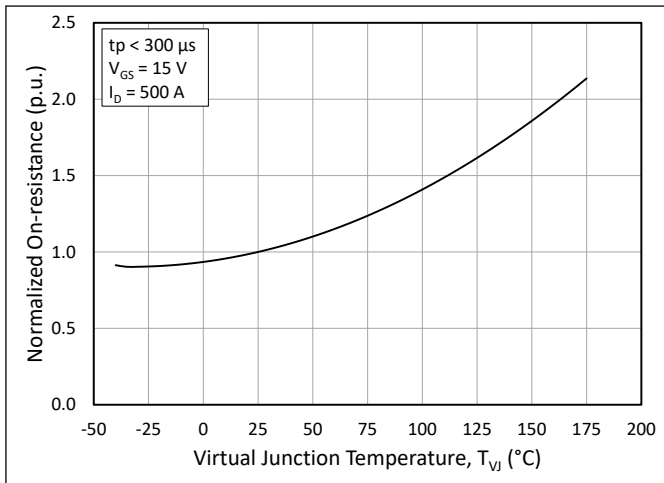


Figure 3. Normalized On-State Resistance vs. Junction Temperature

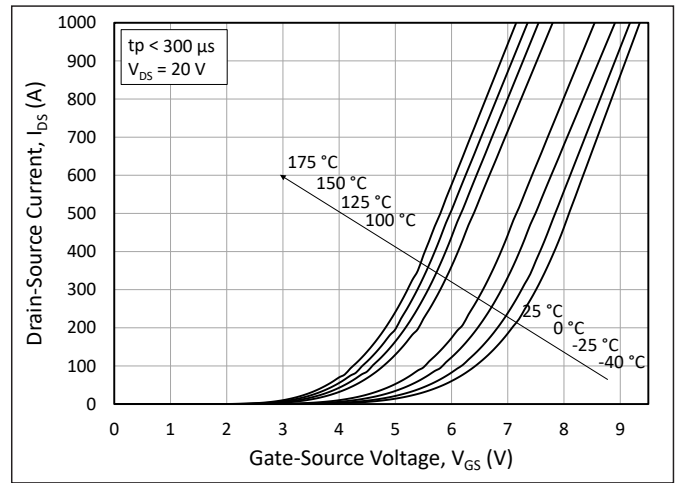


Figure 4. Transfer Characteristic for Various Junction Temperatures

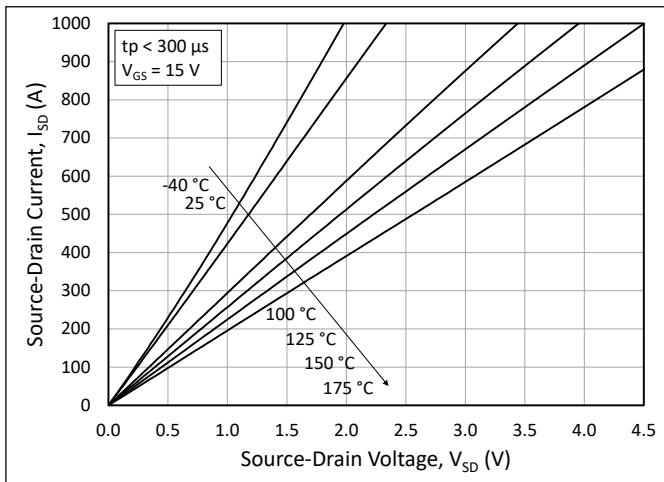


Figure 5. 3<sup>rd</sup> Quadrant Characteristic vs. Junction Temperatures at  $V_{GS} = 15\text{ V}$

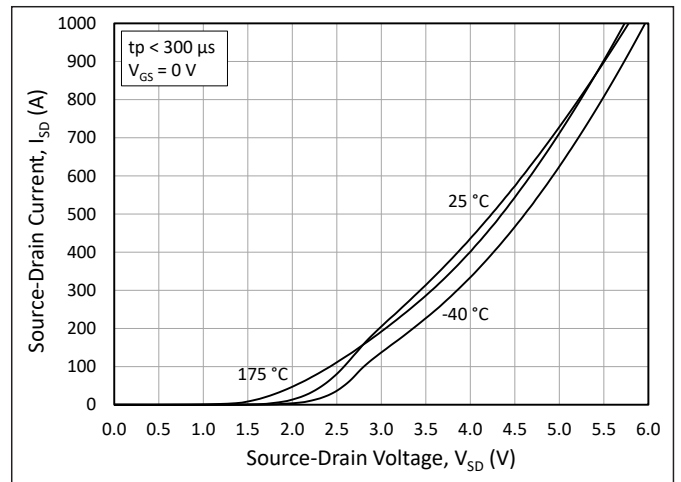


Figure 6. 3<sup>rd</sup> Quadrant Characteristic vs. Junction Temperatures at  $V_{GS} = 0\text{ V}$  (Body Diode)



Typical Performance

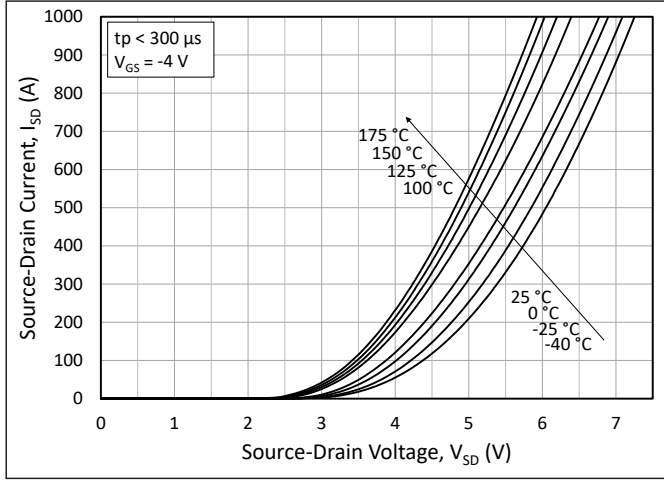


Figure 7. 3<sup>rd</sup> Quadrant Characteristic vs. Junction Temperatures at  $V_{GS} = -4$  V (Body Diode)

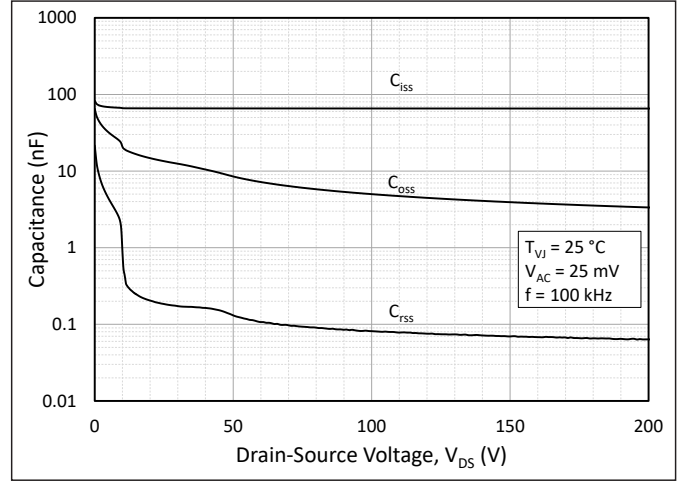


Figure 8. Typical Capacitances vs. Drain to Source Voltage (0 - 200 V)

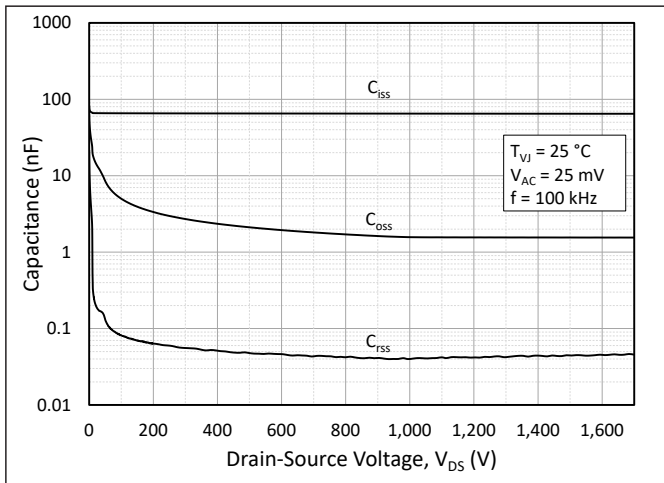


Figure 9. Typical Capacitances vs. Drain to Source Voltage (0 - 1200 V)

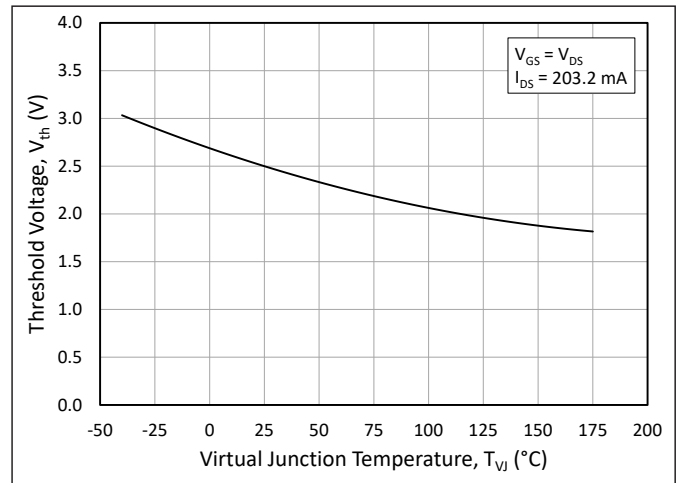


Figure 10. Threshold Voltage vs. Junction Temperature

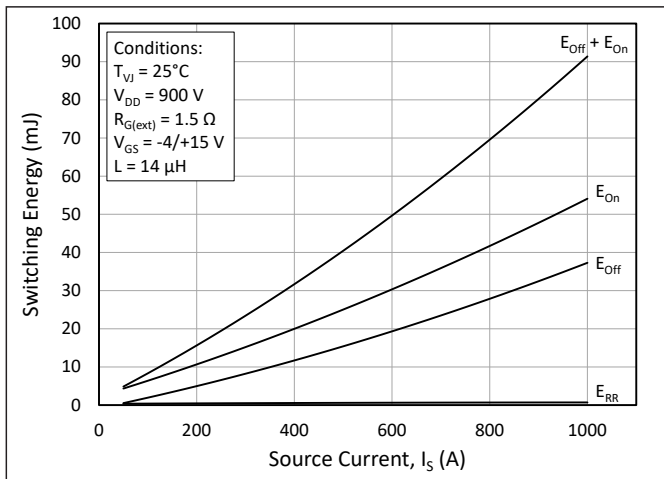


Figure 11. Switching Energy vs. Drain Current ( $V_{DD} = 900$  V)

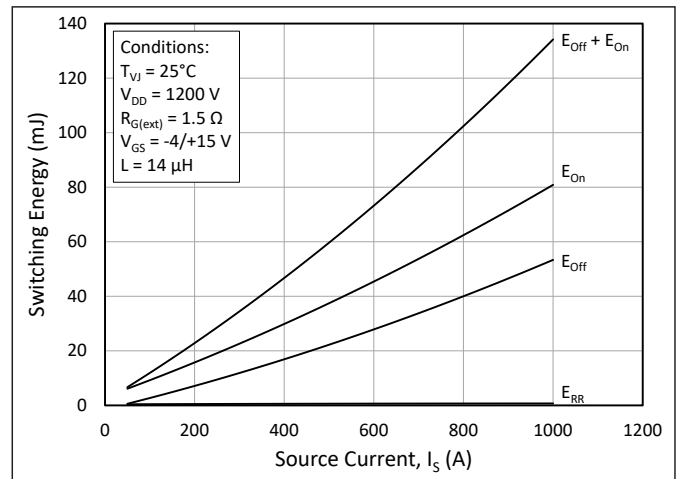


Figure 12. Switching Energy vs. Drain Current ( $V_{DD} = 1200$  V)

Typical Performance

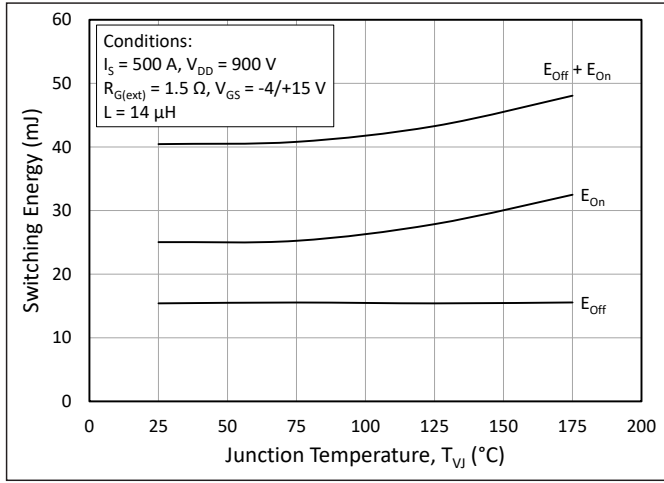


Figure 13. MOSFET Switching Energy vs. Junction Temperature

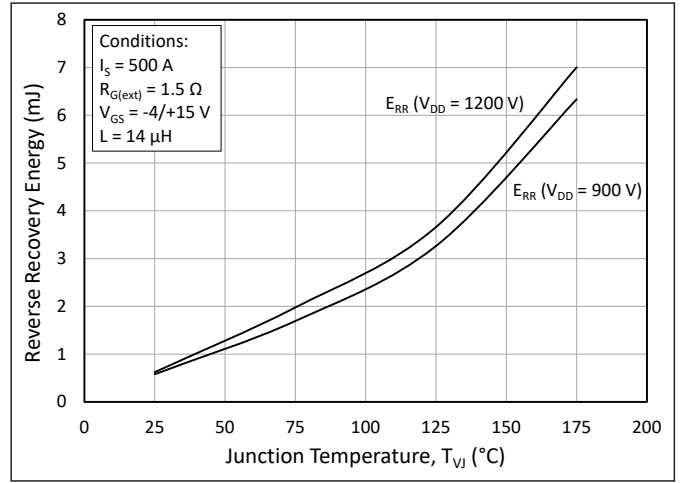


Figure 14. Reverse Recovery Energy vs. Junction Temperature

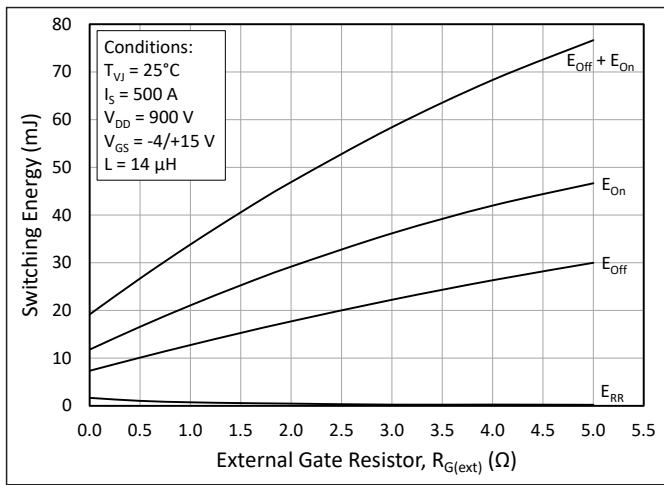


Figure 15. MOSFET Switching Energy vs. External Gate Resistance

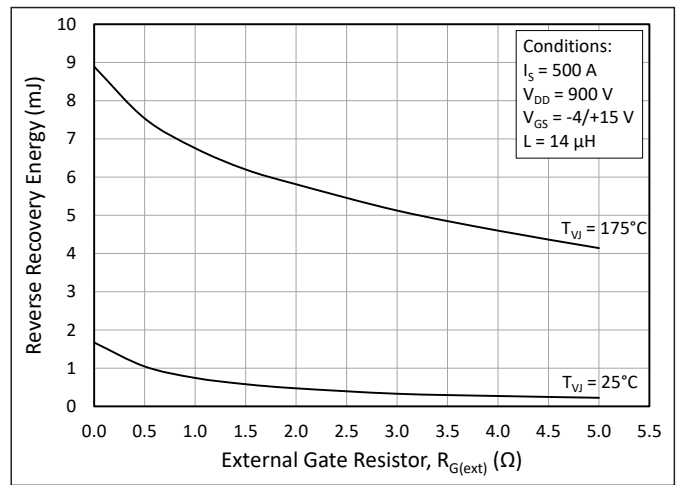


Figure 16. Reverse Recovery Energy vs. External Gate Resistance

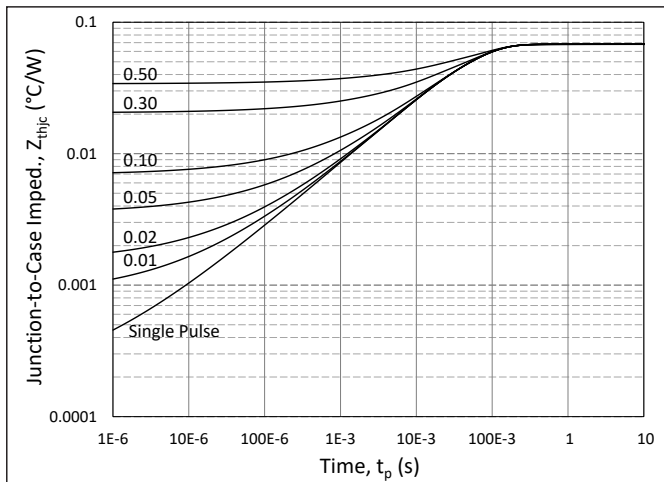


Figure 17. MOSFET Junction to Case Transient Thermal Impedance,  $Z_{th(jc)}$  ( $^{\circ}\text{C}/\text{W}$ )

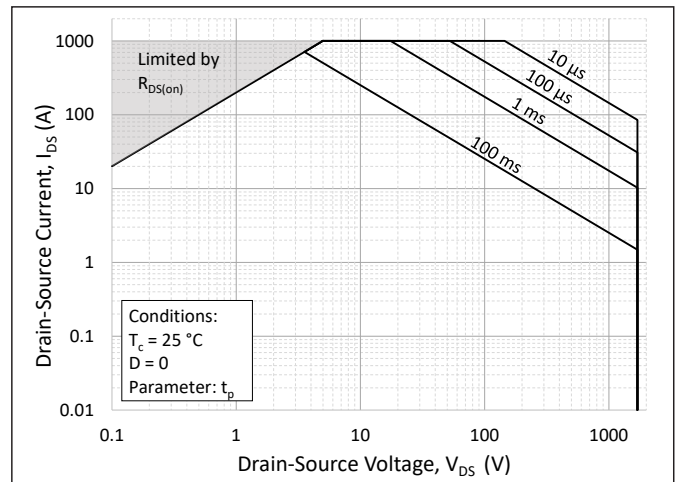


Figure 18. Forward Bias Safe Operating Area (FBSOA)



Typical Performance

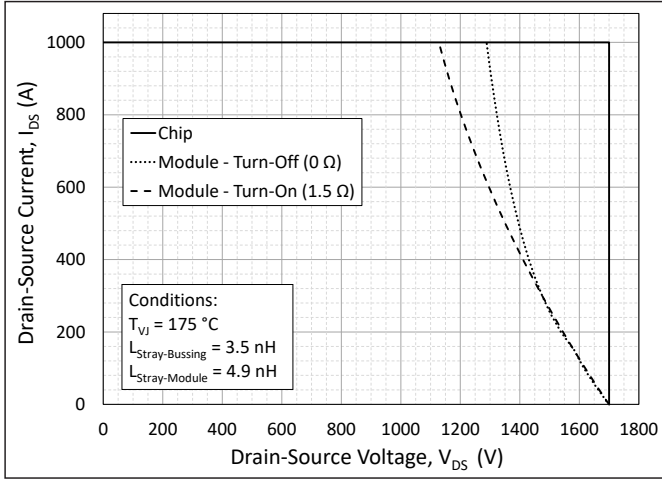


Figure 19. Reverse Bias Safe Operating Area (RBSOA)

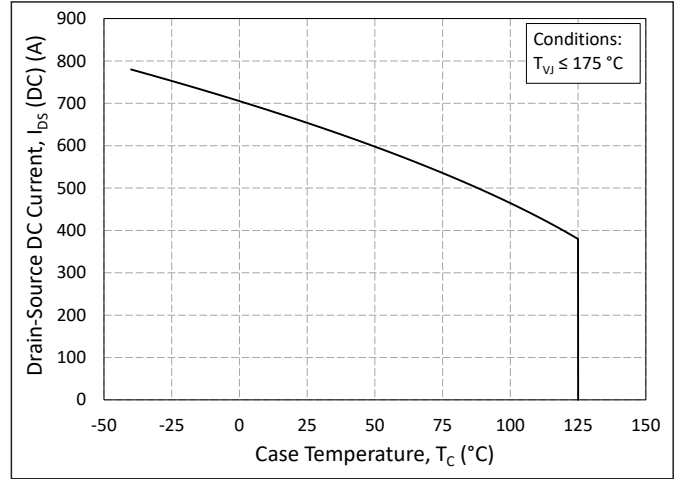


Figure 20. Continuous Drain Current Derating vs. Case Temperature

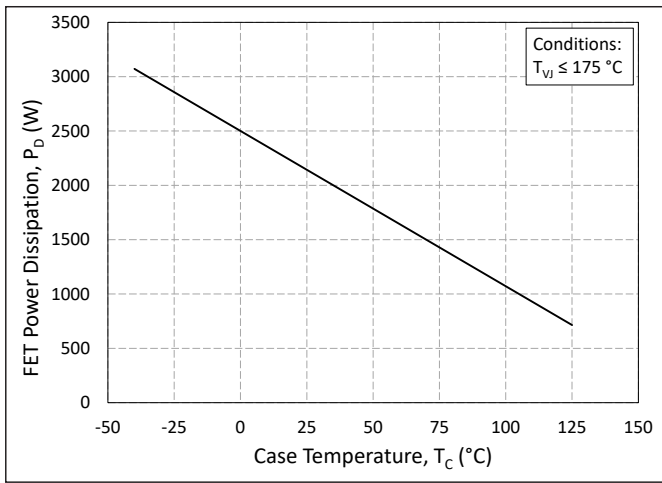


Figure 21. Maximum Power Dissipation Derating vs. Case Temperature

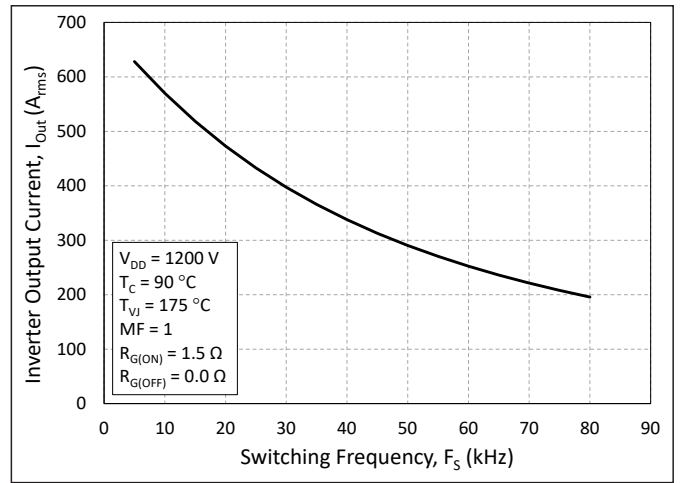


Figure 22. Typical Output Current Capability vs. Switching Frequency (Inverter Application)

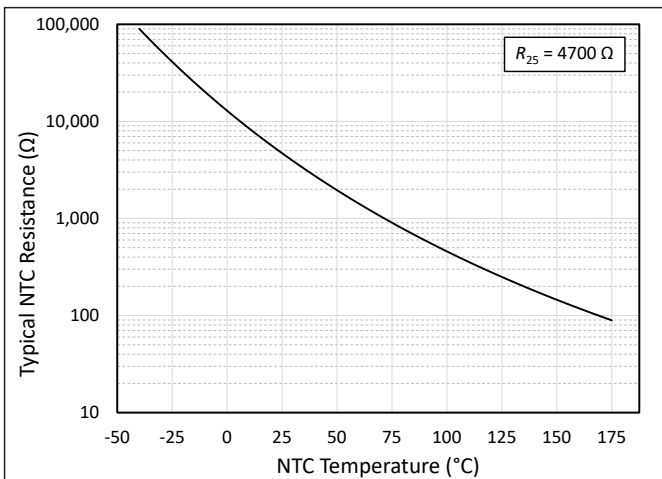


Figure 23. NTC Resistance vs. NTC Temperature



Timing Characteristics

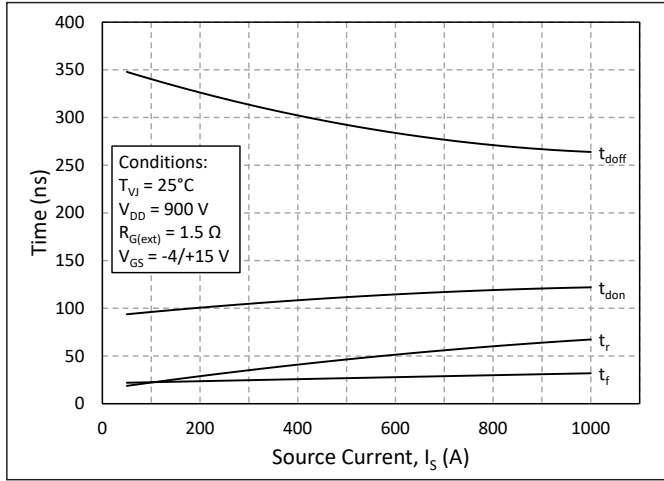


Figure 24. Timing vs. Source Current

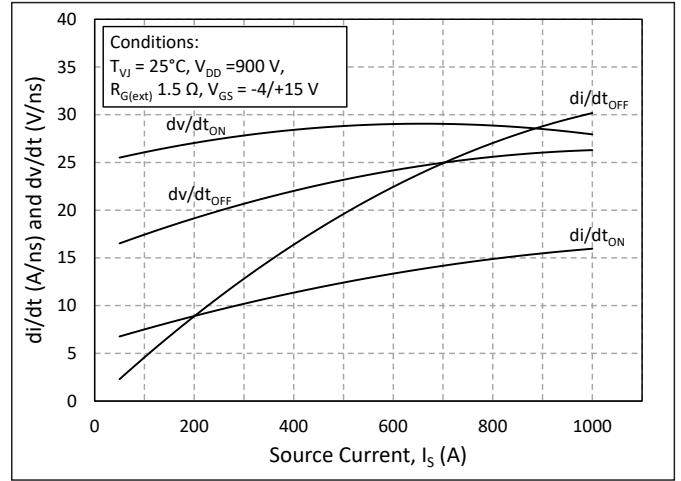


Figure 25. dv/dt and di/dt vs. Source Current

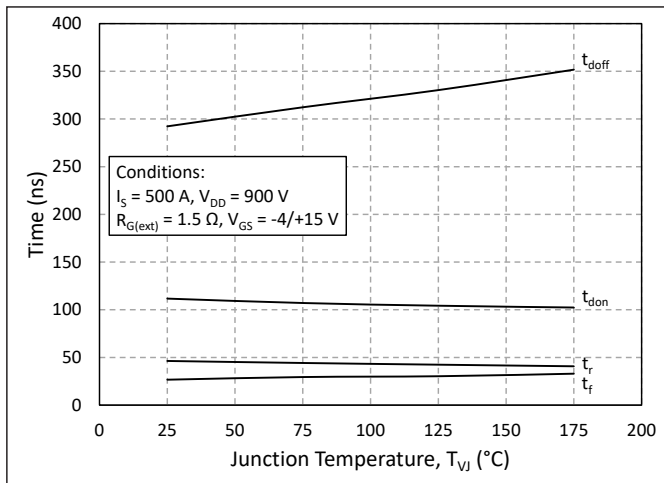


Figure 26. Timing vs. Junction Temperature

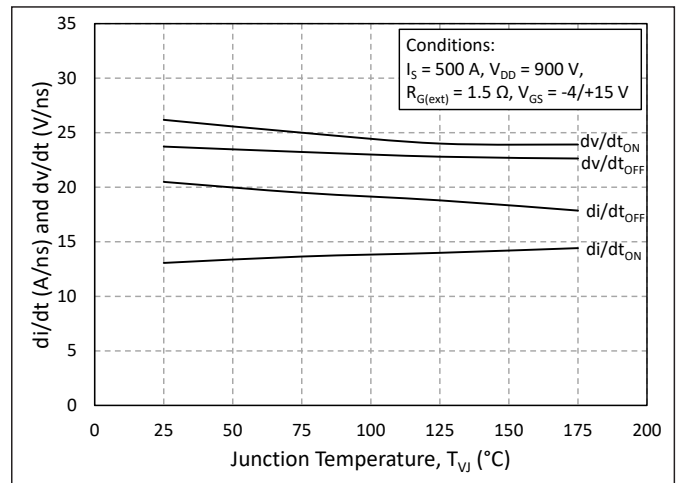


Figure 27. dv/dt and di/dt vs. Junction Temperature

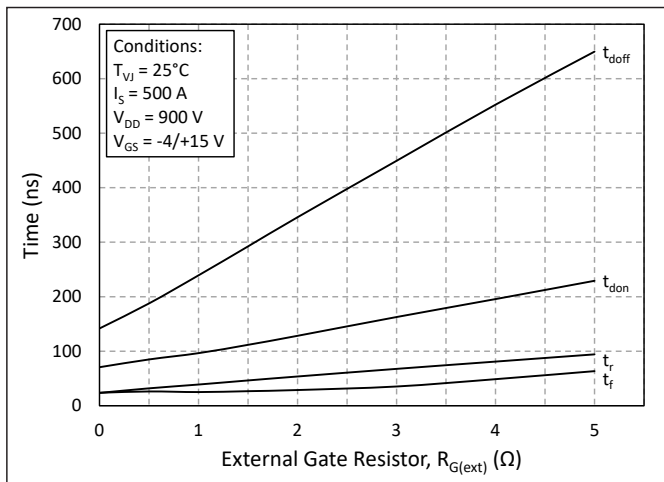


Figure 28. Timing vs. External Gate Resistance


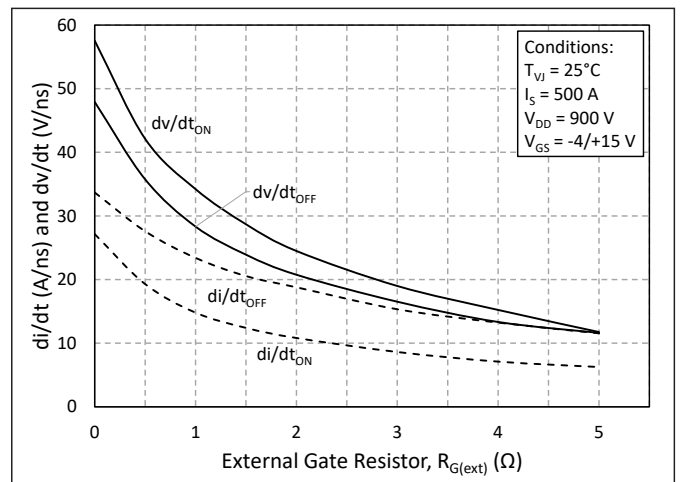


Figure 29. dv/dt and di/dt vs. External Gate Resistance







**Definitions**

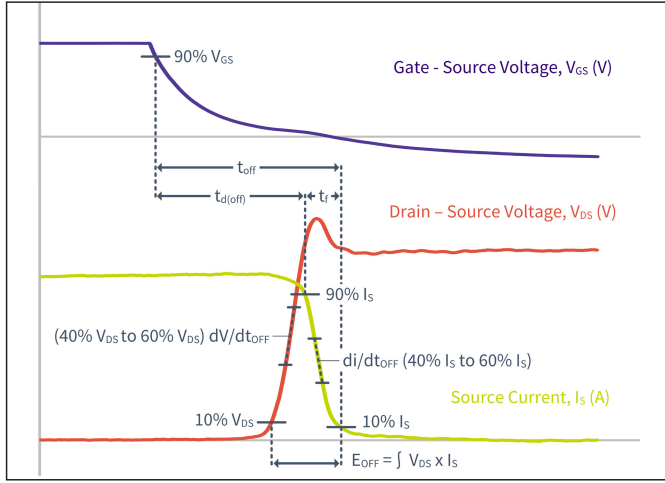


**Figure 30. Turn-Off Transient Definitions**

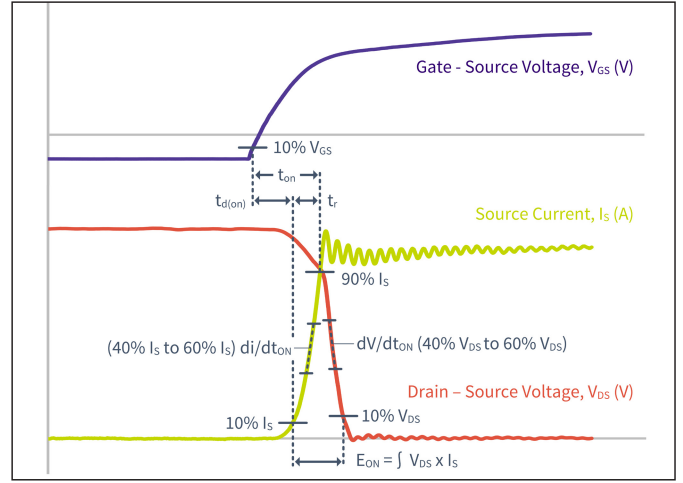

**Figure 31. Turn-On Transient Definitions**

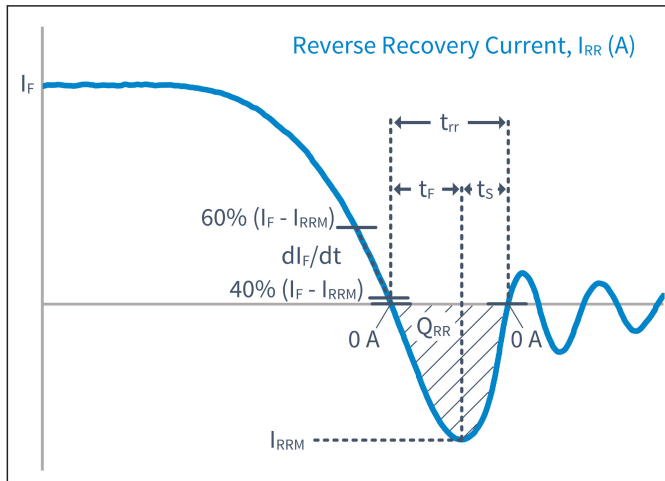


**Figure 32. Reverse Recovery Definitions**

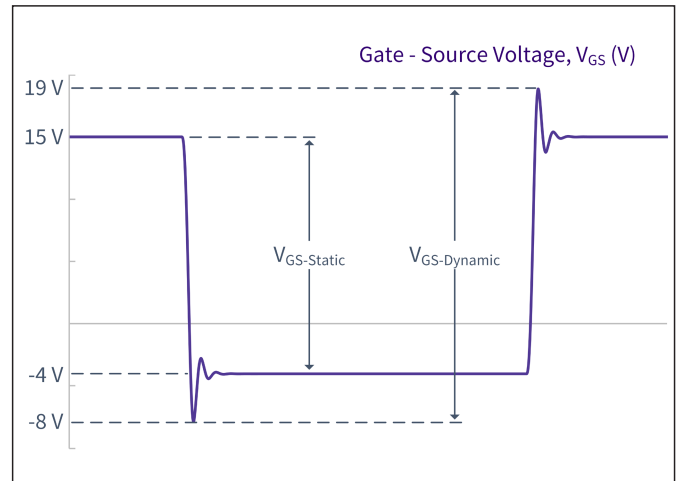


**Figure 33. V\_GS Transient Definitions**





### Schematic and Pin Out

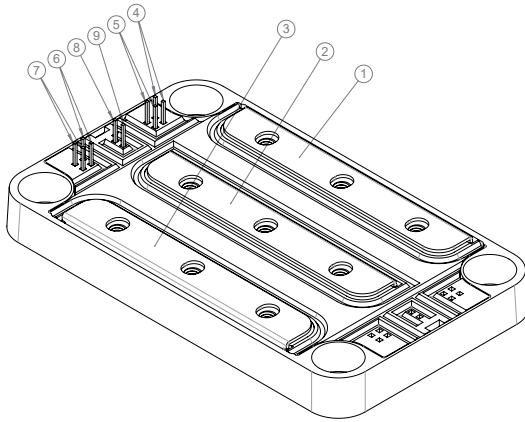

| PIN OUT SCHEME |                         |
|----------------|-------------------------|
| PIN            | LABEL                   |
| ①              | V+                      |
| ②              | Mid                     |
| ③              | V-                      |
| ④              | G1, Top row pins (2)    |
| ⑤              | K1, Bottom row pins (2) |
| ⑥              | G2, Top row pins (2)    |
| ⑦              | K2, Bottom row pins (2) |
| ⑧              | NTC1                    |
| ⑨              | NTC2                    |




### Package Dimension (mm)

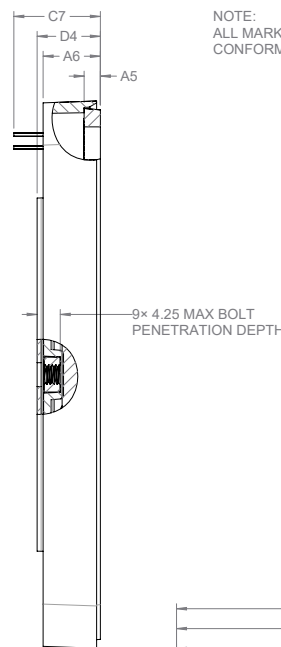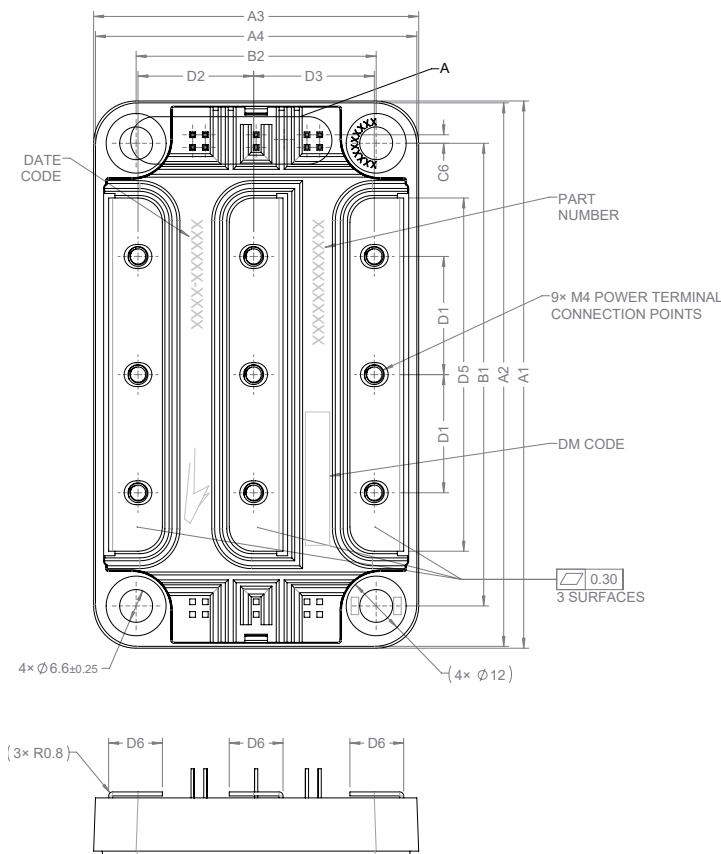

NOTE:  
ALL MARKINGS SHALL  
CONFORM TO PRC-00786.

| DIMENSION TABLE |           |            |
|-----------------|-----------|------------|
| SYMBOL          | DIMENSION | TOLERANCE  |
| A1              | 110.00    | $\pm 0.60$ |
| A2              | 109.25    | $\pm 0.60$ |
| A3              | 65.00     | $\pm 0.60$ |
| A4              | 64.25     | $\pm 0.60$ |
| A5              | 3.25      | $\pm 0.30$ |
| A6              | 11.45     | $\pm 0.60$ |
| B1              | 93.00     | $\pm 0.30$ |
| B2              | 48.00     | $\pm 0.30$ |
| C1              | 11.30     | $\pm 0.40$ |
| C2              | 13.84     | $\pm 0.40$ |
| C3              | 24.00     | $\pm 0.40$ |
| C4              | 34.16     | $\pm 0.40$ |
| C5              | 36.70     | $\pm 0.40$ |
| C6              | 1.71      | $\pm 0.40$ |
| C7              | 17.30     | $\pm 0.50$ |
| C8              | 2.54      | $\pm 0.30$ |
| C9              | 0.64      | $\pm 0.30$ |
| C10             | 10.16     | $\pm 0.40$ |
| D1              | 23.75     | $\pm 0.50$ |
| D2              | 23.13     | $\pm 0.50$ |
| D3              | 24.13     | $\pm 0.50$ |
| D4              | 12.20     | $\pm 0.50$ |
| D5              | 71.00     | $\pm 0.30$ |
| D6              | 10.75     | $\pm 0.30$ |

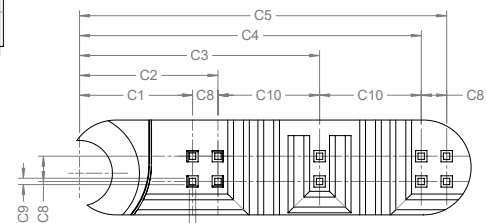

DETAIL A  
SCALE: 4:1



## Supporting Links & Tools

### Evaluation Tools & Support

- [PLECS Models](#)
- [LTSpice Models](#)
- [SpeedFit 2.0 Design Simulator™](#)
- [Technical Support Forum](#)
- [Dynamic Characterization Evaluation Tool for the High Performance 62mm \(HM\) Module Platform](#)

### Dual-Channel Gate Driver Board

- [CGD1700HB3P-HM3: Wolfspeed Gate Driver Board](#)
- [CGD12HB00D: Differential Transceiver Daughter Board Companion Tool for Differential Gate Drivers](#)

### Application Notes

- [CPWR-AN35: 62mm Thermal Interface Material Application Note](#)
- [CPWR-AN39: KIT-CRD-CIL12N-HM User Guide](#)
- [PRD-04814: Design Options for Wolfspeed® Silicon Carbide MOSFET Gate Bias Power Supplies](#)



## Notes & Disclaimers

---

WOLFSPPEED PROVIDES TECHNICAL AND RELIABILITY DATA, DESIGN RESOURCES, APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT THERETO, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfsppeed. No communication from any employee or agent of Wolfsppeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfsppeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfsppeed.

The information contained in this document (excluding examples, as well as figures or values that are labeled as “typical”) constitutes Wolfsppeed’s sole published specifications for the subject product. “Typical” parameters are the average values expected by Wolfsppeed in large quantities and are provided for informational purposes only. Any examples provided herein have not been produced under conditions intended to replicate any specific end use. Product performance can and does vary due to a number of factors.

This product has not been designed or tested for use in, and is not intended for use in, any application in which failure of the product would reasonably be expected to cause death, personal injury, or property damage. For purposes of (but without limiting) the foregoing, this product is not designed, intended, or authorized for use as a critical component in equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment; air traffic control systems; or equipment used in the planning, construction, maintenance, or operation of nuclear facilities. Notwithstanding any application-specific information, guidance, assistance, or support that Wolfsppeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer’s purposes, including without limitation (1) selecting the appropriate Wolfsppeed products for the buyer’s application, (2) designing, validating, and testing the buyer’s application, and (3) ensuring the buyer’s application meets applicable standards and any other legal, regulatory, and safety-related requirements.

### **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfsppeed representative or from the Product Documentation sections of [www.wolfsppeed.com](http://www.wolfsppeed.com).

### **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfsppeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

### **Contact info:**

4600 Silicon Drive  
Durham, NC 27703 USA  
Tel: +1.919.313.5300  
[www.wolfsppeed.com/power](http://www.wolfsppeed.com/power)