


WAS175M12BM3, WAS175M12BM3T

1200 V, 175 A, Silicon Carbide, Half-Bridge Module

V_{DS}	1200 V
I_{DS}	175 A

Technical Features

- Industry Standard 62 mm Footprint
- High Humidity Operation THB-80 (HV-H3TRB)
- Ultra Low Loss, High-Frequency Operation
- Zero Reverse Recovery from Diodes
- Zero Turn-off Tail Current from MOSFET
- Normally-off, Fail-safe Device Operation
- Copper Baseplate and Aluminum Nitride Insulator

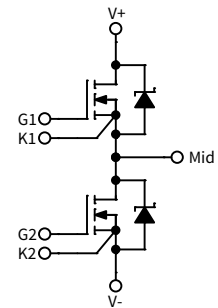

Typical Applications

- Induction Heating
- Motor Drives
- Renewables
- Railway Auxiliary & Traction
- EV Fast Charging
- UPS and SMPS

System Benefits

- 62 mm Form Factor Enables System Retrofit
- Increased System Efficiency, due to Low Switching & Conduction Losses of SiC

Key Parameters

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Note	
Drain-Source Voltage	V_{DS}			1200	V			
Gate-Source Voltage, Maximum Value	$V_{GS(max)}$	-10		+23		Transient	Note 1 Fig. 33	
Gate-Source Voltage, Recommended	$V_{GS(op)}$		-4/+15			Static		
DC Continuous Drain Current	I_D		234		A	$V_{GS} = 15\text{ V}, T_C = 25\text{ }^\circ\text{C}, T_{VJ} \leq 175\text{ }^\circ\text{C}$	Notes 2, 3 Fig. 21	
			176			$V_{GS} = 15\text{ V}, T_C = 90\text{ }^\circ\text{C}, T_{VJ} \leq 175\text{ }^\circ\text{C}$		
DC Source-Drain Current (Schottky Diode)	$I_{SD(SD)}$		236			$V_{GS} = -4\text{ V}, T_C = 25\text{ }^\circ\text{C}, T_{VJ} \leq 175\text{ }^\circ\text{C}$		
Pulsed Drain-Source Current	I_{DM}		350			t_{Pmax} limited by T_{VJmax} $V_{GS} = 15\text{ V}, T_C = 25\text{ }^\circ\text{C}$		
Power Dissipation	P_D		789		W	$T_C = 25\text{ }^\circ\text{C}, T_{VJ} \leq 175\text{ }^\circ\text{C}$	Note 4 Fig. 21	
Virtual Junction Temperature	$T_{VJ(op)}$	-40		150	$^\circ\text{C}$	Operation		
				175		Intermittent with Reduced Life		

Note (1): Recommended turn-on gate voltage is 15 V with $\pm 5\%$ regulation tolerance. Not for use in linear region.

Note (2): Current limit calculated by $I_{D(max)} = \sqrt{(P_D/R_{DS(typ)}(T_{VJ(max)}, I_{D(max)}))}$

Note (3): Verified by design

Note (4): $P_D = (T_{VJ} - T_C)/R_{TH(JC, typ)}$

MOSFET Characteristics (Per Position) ($T_{VJ} = 25\text{ °C}$ Unless Otherwise Specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Note
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	1200				$V_{GS} = 0\text{ V}$, $T_{VJ} = -40\text{ °C}$	
Gate Threshold Voltage	$V_{GS(th)}$	1.8	2.5	3.6	V	$V_{DS} = V_{GS}$, $I_D = 43\text{ mA}$	
			2.0			$V_{DS} = V_{GS}$, $I_D = 43\text{ mA}$, $T_{VJ} = 175\text{ °C}$	
Zero Gate Voltage Drain Current	I_{DSS}		4.1	564	μA	$V_{GS} = 0\text{ V}$, $V_{DS} = 1200\text{ V}$	
Gate-Source Leakage Current	I_{GSS}		20	200	nA	$V_{GS} = 15\text{ V}$, $V_{DS} = 0\text{ V}$	
Drain-Source On-State Resistance (Devices Only)	$R_{DS(on)}$		8.0	10.4	m Ω	$V_{GS} = 15\text{ V}$, $I_D = 175\text{ A}$	Fig. 2 Fig. 3
			12.9			$V_{GS} = 15\text{ V}$, $I_D = 175\text{ A}$, $T_{VJ} = 150\text{ °C}$	
			14.4			$V_{GS} = 15\text{ V}$, $I_D = 175\text{ A}$, $T_{VJ} = 175\text{ °C}$	
Transconductance	g_{fs}		156		S	$V_{DS} = 20\text{ V}$, $I_D = 175\text{ A}$	Fig. 4
			146			$V_{DS} = 20\text{ V}$, $I_D = 175\text{ A}$, $T_{VJ} = 150\text{ °C}$	
Turn-On Switching Energy, $T_{VJ} = 25\text{ °C}$ $T_{VJ} = 125\text{ °C}$ $T_{VJ} = 150\text{ °C}$	E_{ON}		2.7 2.5 2.4		mJ	$V_{DD} = 600\text{ V}$, $I_D = 175\text{ A}$, $V_{GS} = -4\text{ V}/15\text{ V}$, $R_{G(OFF)} = 0.0\text{ }\Omega$, $R_{G(ON)} = 0.0\text{ }\Omega$, $L = 42\text{ }\mu\text{H}$	Fig. 11 Fig. 13
Turn-Off Switching Energy, $T_{VJ} = 25\text{ °C}$ $T_{VJ} = 125\text{ °C}$ $T_{VJ} = 150\text{ °C}$	E_{OFF}		1.9 2.0 2.0				
Internal Gate Resistance	$R_{G(int)}$		5.05		Ω	$f = 100\text{ kHz}$	
Input Capacitance	C_{iss}		12.9		nF	$V_{GS} = 0\text{ V}$, $V_{DS} = 800\text{ V}$, $V_{AC} = 25\text{ mV}$, $f = 100\text{ kHz}$	Fig. 9
Output Capacitance	C_{oss}		942		pF		
Reverse Transfer Capacitance	C_{rss}		26.4				
Gate to Source Charge	Q_{GS}		134		nC	$V_{DS} = 800\text{ V}$, $V_{GS} = -4\text{ V}/15\text{ V}$, $I_D = 175\text{ A}$, Per IEC60747-8-4 pg 21	
Gate to Drain Charge	Q_{GD}		122				
Total Gate Charge	Q_G		422				
FET Thermal Resistance, Junction to Case	R_{thJC}		0.190		$^{\circ}\text{C}/\text{W}$		Fig. 17

Diode Characteristics (Per Position) ($T_{VJ} = 25\text{ °C}$ Unless Otherwise Specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Note
Diode Forward Voltage	V_F		1.8		V	$V_{GS} = -4\text{ V}$, $I_F = 175\text{ A}$, $T_{VJ} = 25\text{ °C}$	Fig. 7
			2.3			$V_{GS} = -4\text{ V}$, $I_F = 175\text{ A}$, $T_{VJ} = 150\text{ °C}$	
Reverse Recovery Time	t_{rr}		20.8		ns	$V_{GS} = -4\text{ V}$, $I_{SD} = 175\text{ A}$, $V_R = 800\text{ V}$ $di/dt = 6.9\text{ A/ns}$, $T_{VJ} = 150\text{ °C}$	Fig. 32
Reverse Recovery Charge	Q_{rr}		1.8		μC		
Peak Reverse Recovery Current	I_{rrm}		143		A		
Reverse Recovery Energy, $T_{VJ} = 25\text{ °C}$ $T_{VJ} = 125\text{ °C}$ $T_{VJ} = 150\text{ °C}$	E_{rr}		0.5 0.6 0.6		mJ	$V_{DS} = 600\text{ V}$, $I_D = 175\text{ A}$, $V_{GS} = -4\text{ V}/15\text{ V}$, $R_{G(ext)} = 0.0\text{ }\Omega$, $L = 42\text{ }\mu\text{H}$	Fig. 14 Note 5
Diode Thermal Resistance, JCT. to Case	R_{thJC}		0.216		$^{\circ}\text{C}/\text{W}$		Fig. 18

Note (5): SiC Schottky diodes do not have reverse recovery energy but still contribute capacitive energy.



Module Physical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	
Package Resistance, M1 (High-Side)	R_{3-1}		2.30		m Ω	$T_C = 25^\circ\text{C}$, $I_{SD} = 175\text{ A}$, Note 6	
			3.22			$T_C = 125^\circ\text{C}$, $I_{SD} = 175\text{ A}$, Note 6	
Package Resistance, M2 (Low-Side)	R_{1-2}		2.12	$T_C = 25^\circ\text{C}$, $I_{SD} = 175\text{ A}$, Note 6			
			2.97	$T_C = 125^\circ\text{C}$, $I_{SD} = 175\text{ A}$, Note 6			
Stray Inductance	L_{Stray}		11.1		nH	Between DC- and DC+, $f = 10\text{ MHz}$	
Case Temperature	T_C	-40		125	$^\circ\text{C}$		
Mounting Torque	M_S		4	5	5.5	N-m	Baseplate, M6-1.0 Bolts
			4	5	5.5		Power Terminals, M6-1.0 Bolts
Weight	W		300		g		
Case Isolation Voltage	V_{isol}	5			kV	AC, 50 Hz, 1 Minute	
Clearance Distance			9		mm	Terminal to Terminal	
			30			Terminal to Baseplate	
Creepage Distance			30			Terminal to Terminal	
			40			Terminal to Baseplate	

Note (6): Total Effective Resistance (Per Switch Position) = MOSFET $R_{DS(on)}$ + Switch Position Package Resistance



Typical Performance

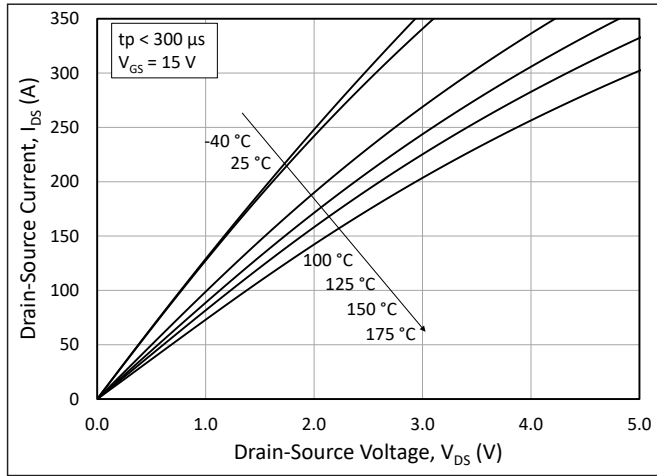


Figure 1. Output Characteristics for Various Junction Temperatures

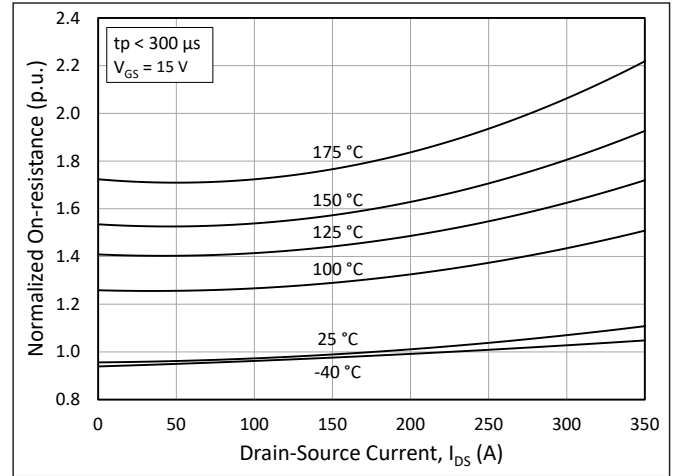


Figure 2. Normalized On-State Resistance vs. Drain Current for Various Junction Temperatures

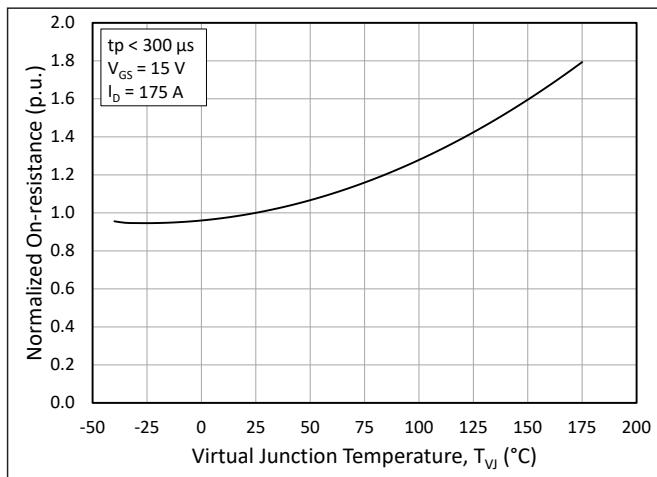


Figure 3. Normalized On-State Resistance vs. Junction Temperature

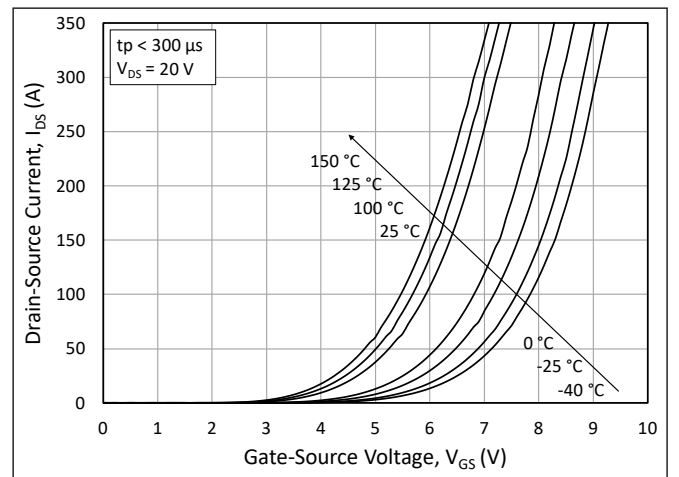


Figure 4. Transfer Characteristic for Various Junction Temperatures

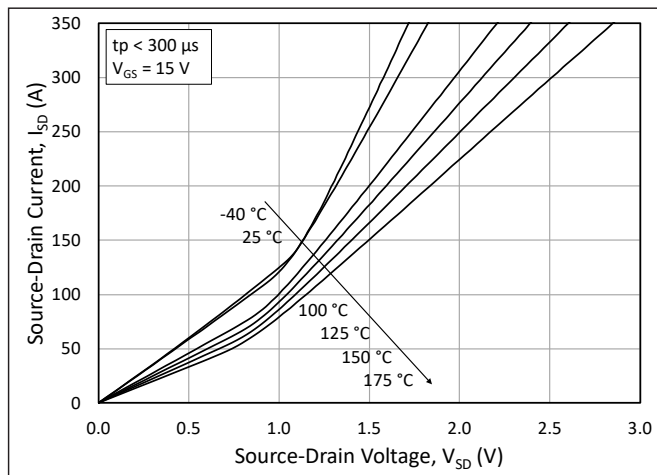


Figure 5. 3rd Quadrant Characteristic vs. Junction Temperatures at $V_{GS} = 15\text{ V}$

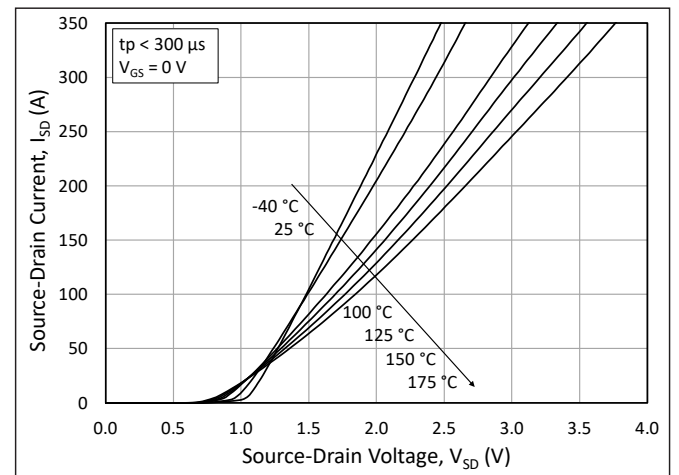


Figure 6. 3rd Quadrant Characteristic vs. Junction Temperatures at $V_{GS} = 0\text{ V}$ (Diode)



Typical Performance

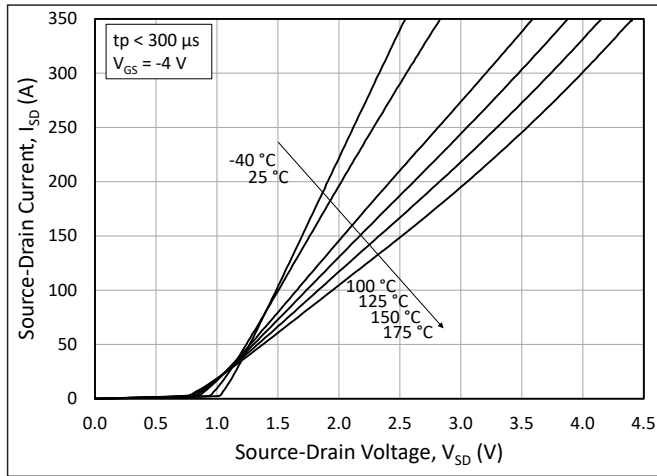


Figure 7. 3rd Quadrant Characteristic vs. Junction Temperatures at $V_{GS} = -4$ V (Diode)

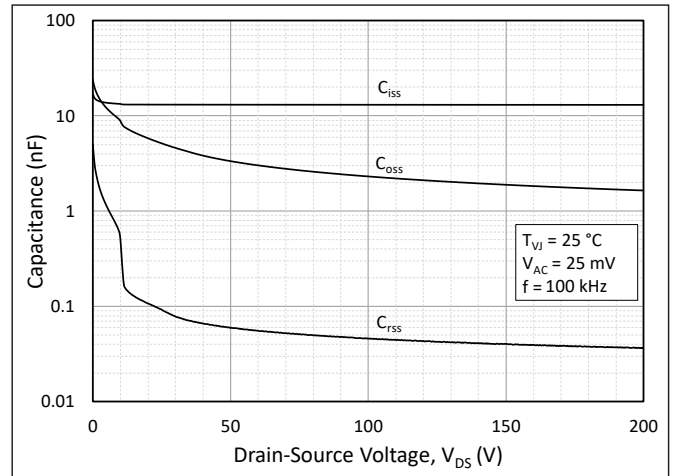


Figure 8. Typical Capacitances vs. Drain to Source Voltage (0 - 200 V)

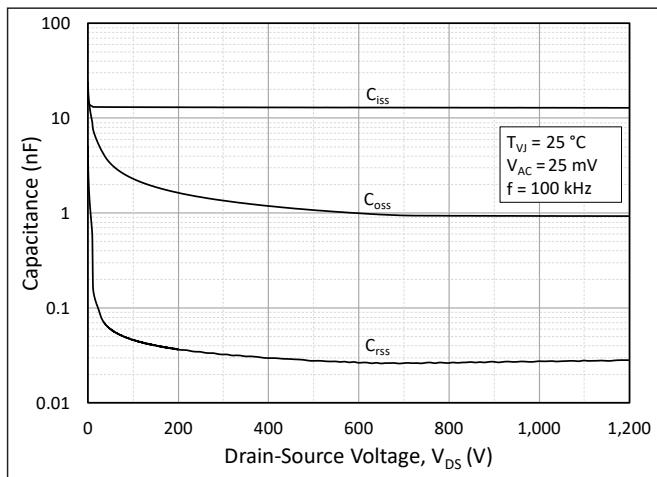


Figure 9. Typical Capacitances vs. Drain to Source Voltage (0 - 1200 V)

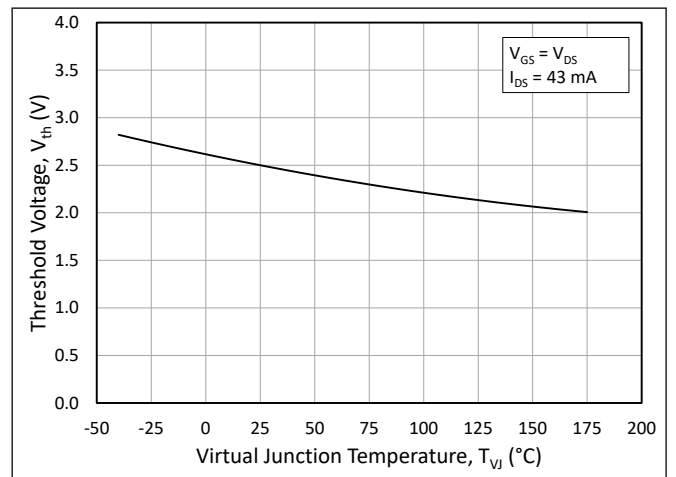


Figure 10. Threshold Voltage vs. Junction Temperature

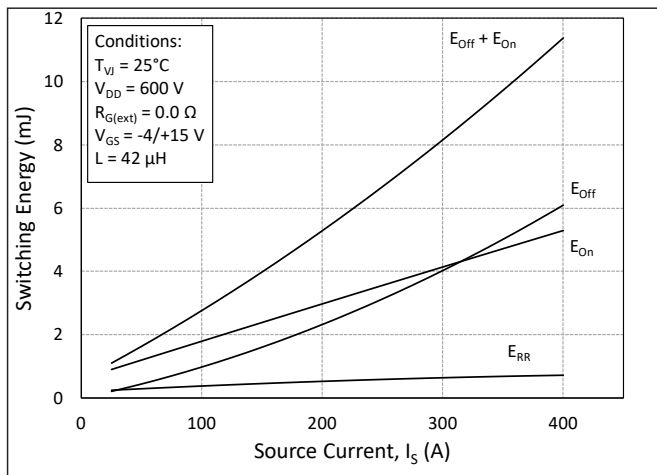


Figure 11. Switching Energy vs. Drain Current ($V_{DS} = 600$ V)

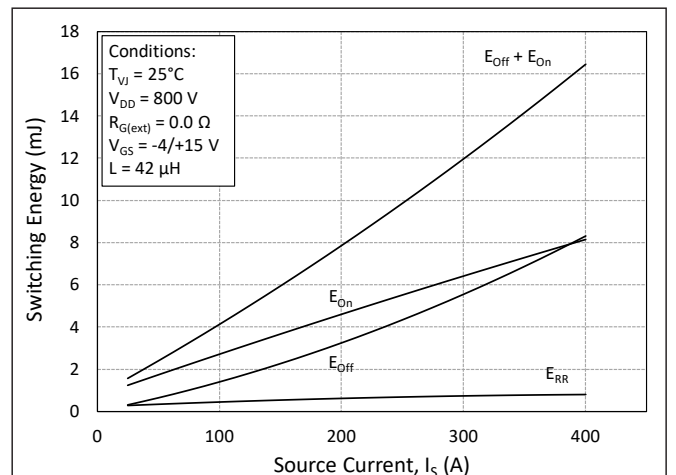


Figure 12. Switching Energy vs. Drain Current ($V_{DS} = 800$ V)



Typical Performance

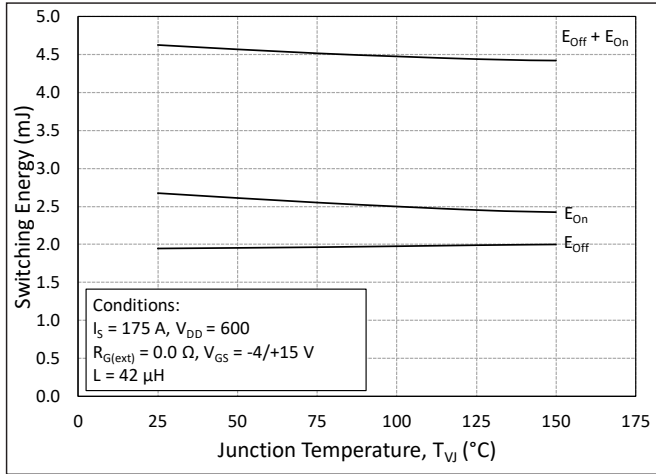


Figure 13. MOSFET Switching Energy vs. Junction Temperature

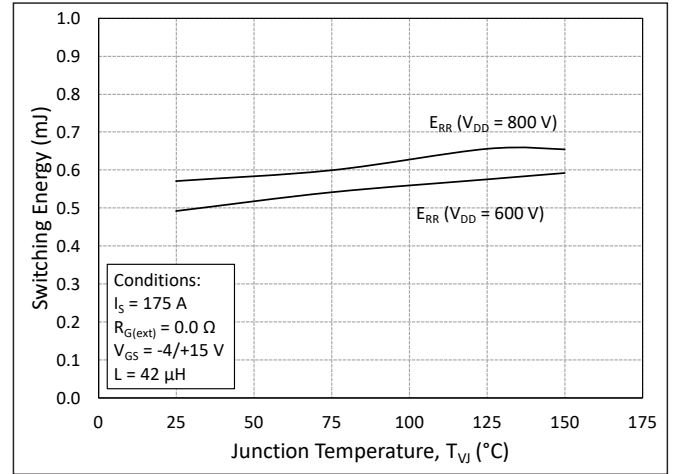


Figure 14. Reverse Recovery Energy vs. Junction Temperature

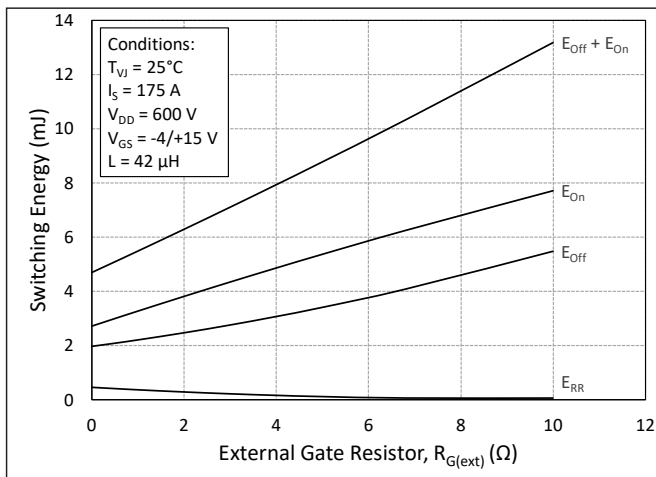


Figure 15. MOSFET Switching Energy vs. External Gate Resistance

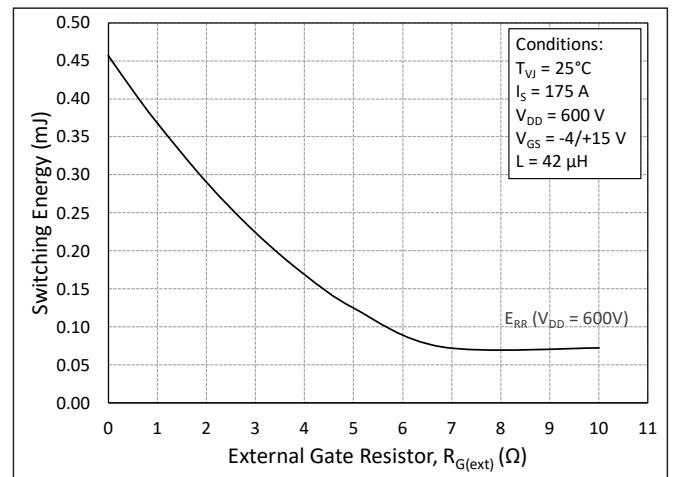


Figure 16. Reverse Recovery Energy vs. External Gate Resistance

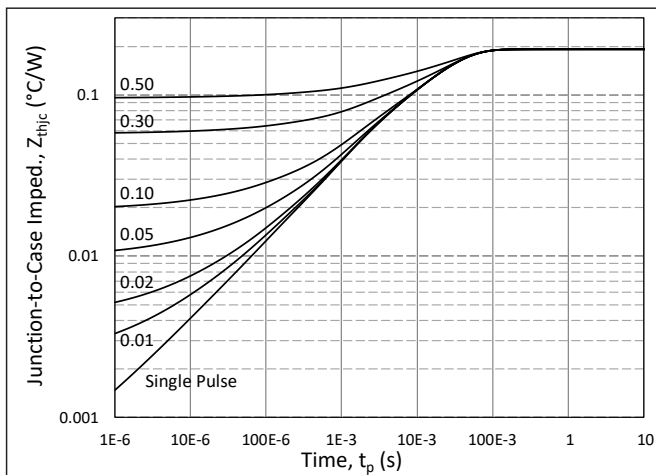


Figure 17. MOSFET Junction to Case Transient Thermal Impedance, Z_{thjc} ($^\circ\text{C/W}$)

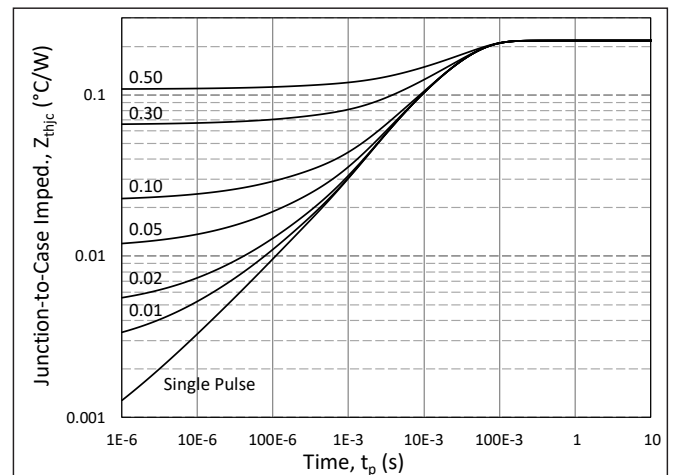


Figure 18. Diode Junction to Case Transient Thermal Impedance, Z_{thjc} ($^\circ\text{C/W}$)



Typical Performance

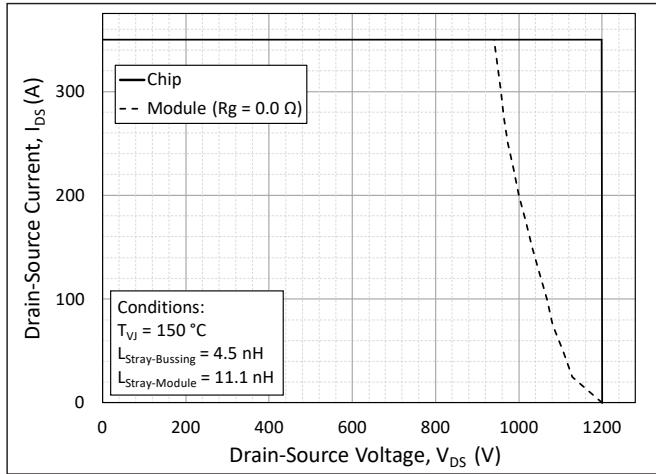


Figure 19. Switching Safe Operating Area

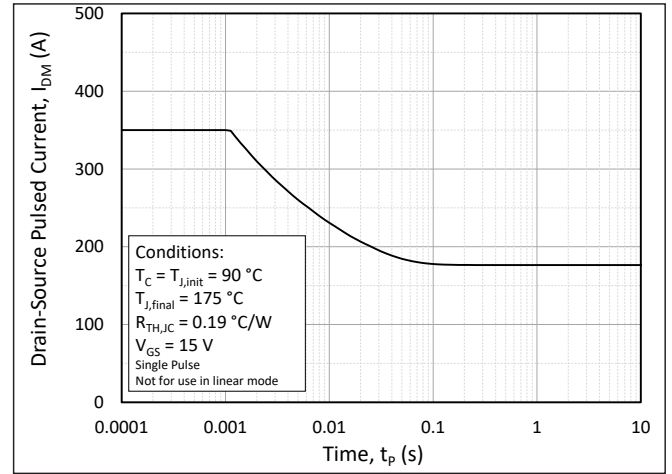


Figure 20. Pulsed Current Safe Operating Area

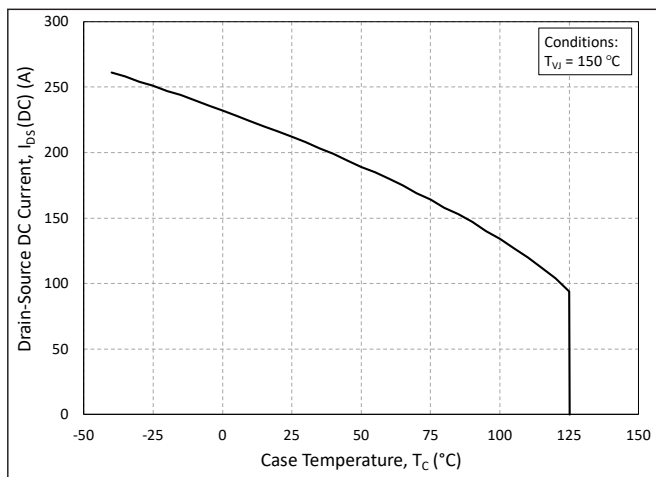


Figure 21. Continuous Drain Current Derating vs. Case Temperature

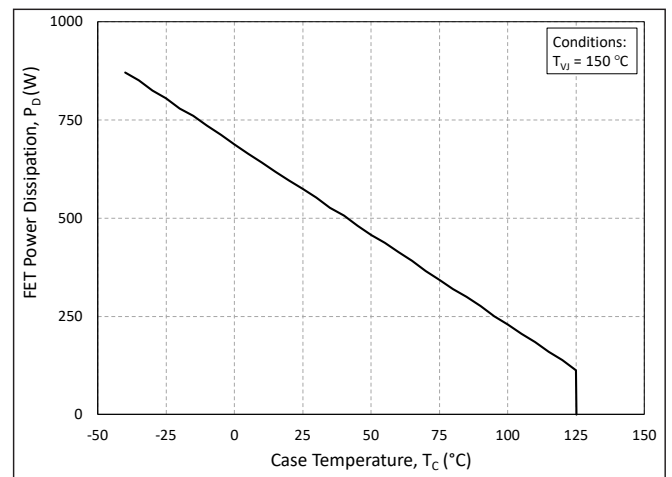


Figure 22. Maximum Power Dissipation Derating vs. Case Temperature

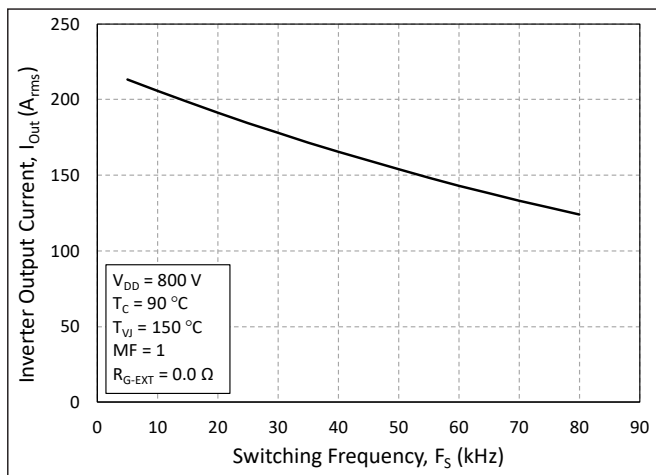


Figure 23. Typical Output Current Capability vs. Switching Frequency (Inverter Application)



Timing Characteristics

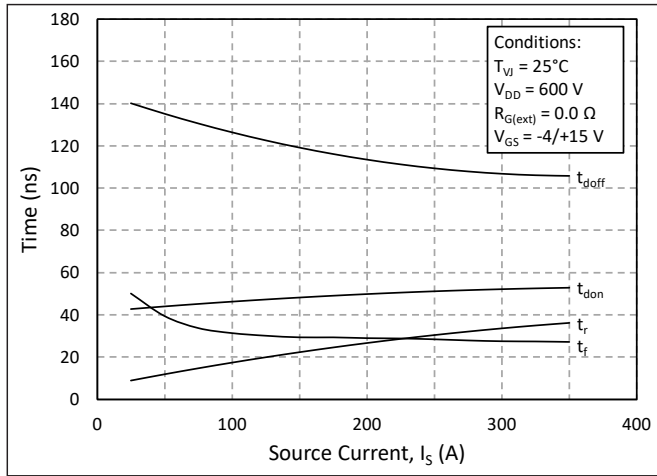


Figure 24. Timing vs. Source Current

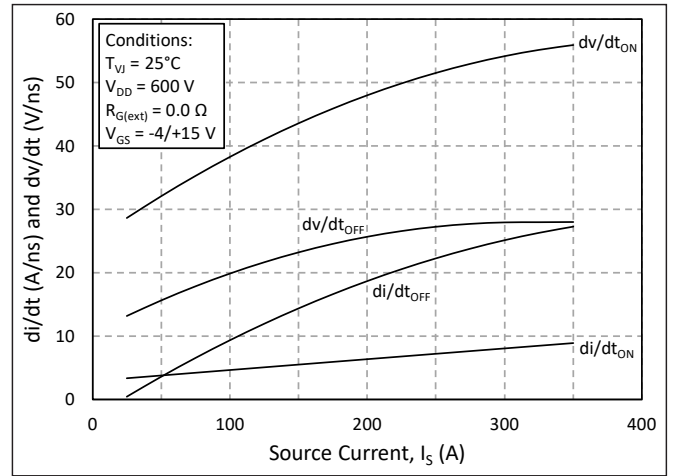


Figure 25. dv/dt and di/dt vs. Source Current

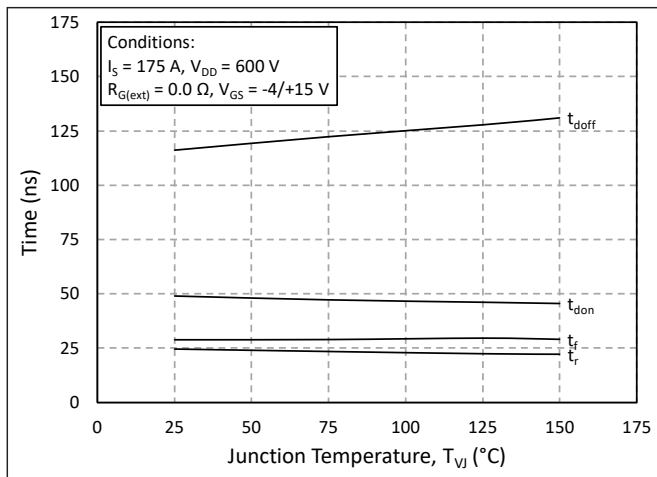


Figure 26. Timing vs. Junction Temperature

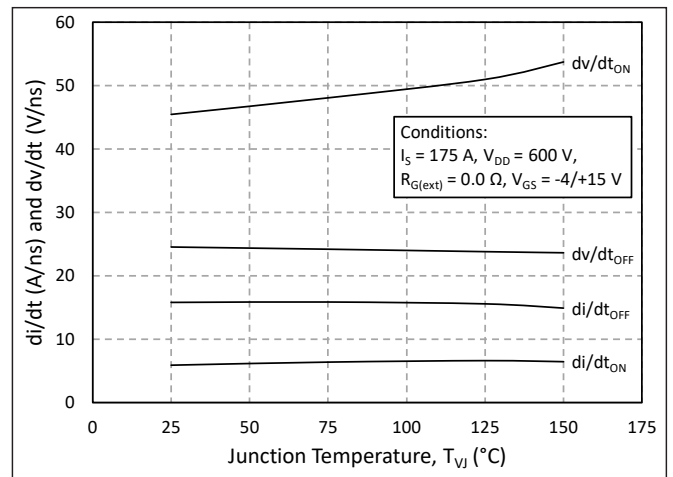


Figure 27. dv/dt and di/dt vs. Junction Temperature

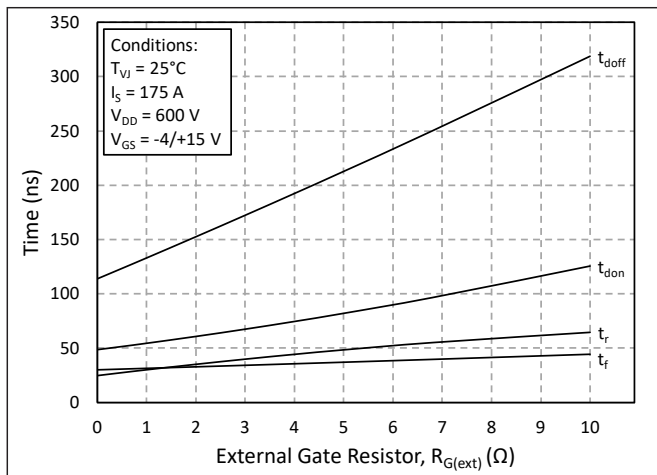


Figure 28. Timing vs. External Gate Resistance

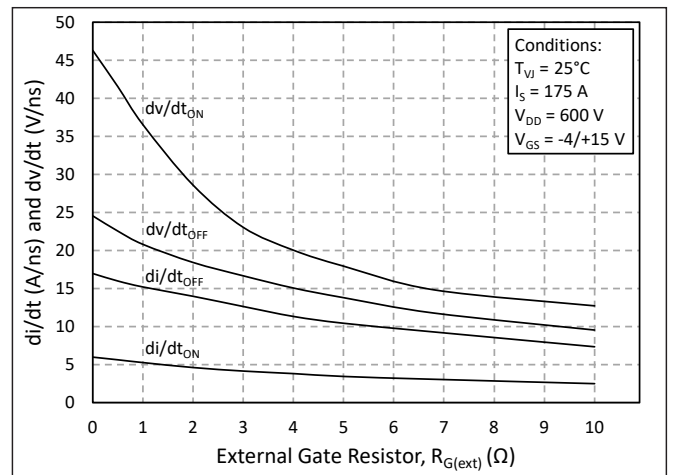


Figure 29. dv/dt and di/dt vs. External Gate Resistance



Definitions

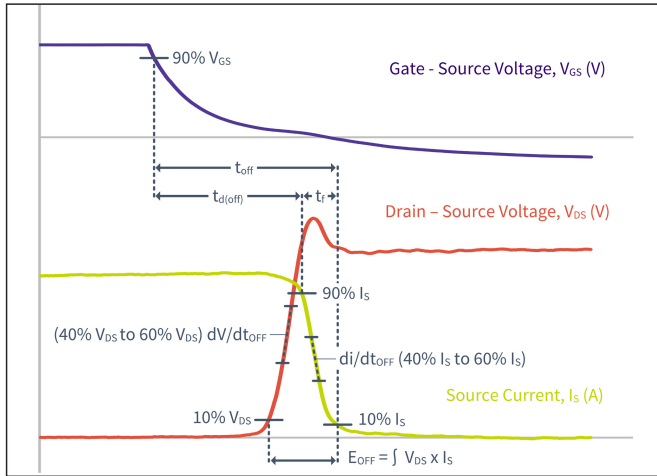


Figure 30. Turn-Off Transient Definitions

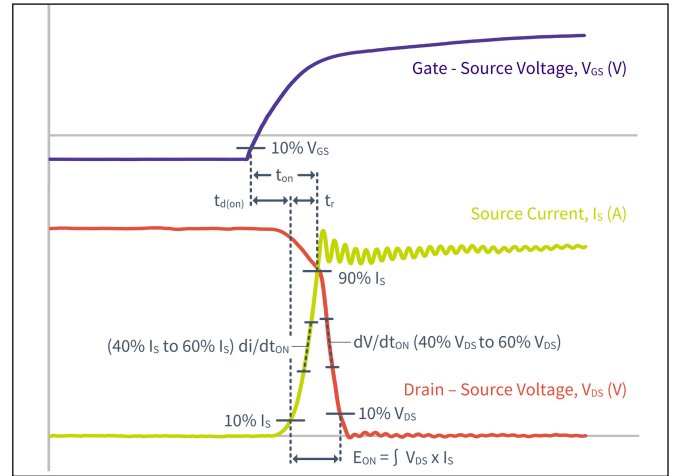


Figure 31. Turn-On Transient Definitions

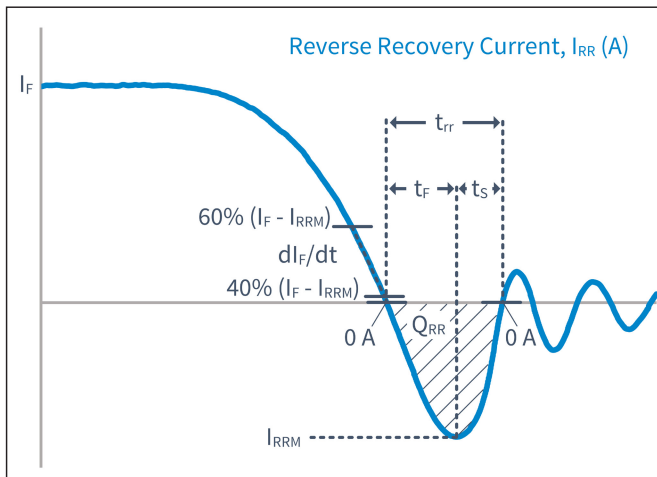


Figure 32. Reverse Recovery Definitions



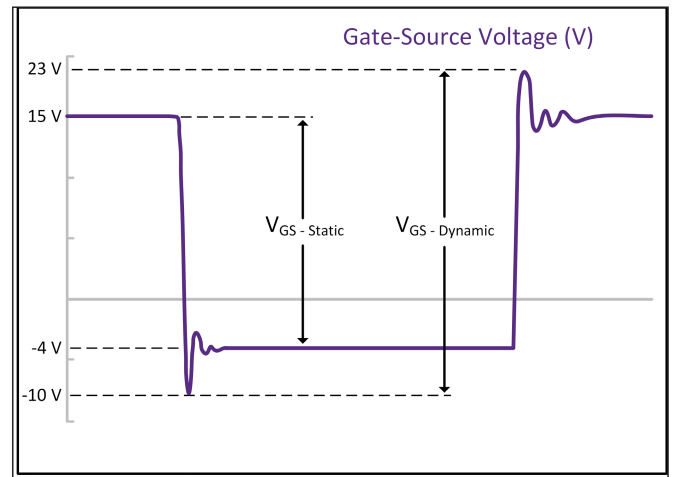



Figure 33. V_{GS} Transient Definitions

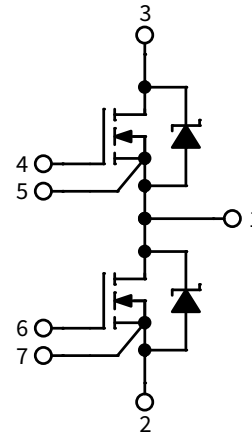


Schematic and Pin Out

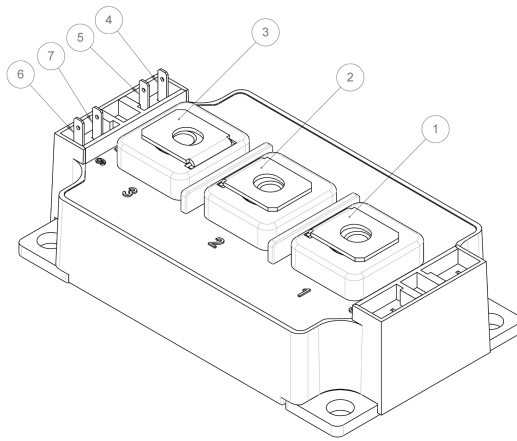

Package Dimension (mm)

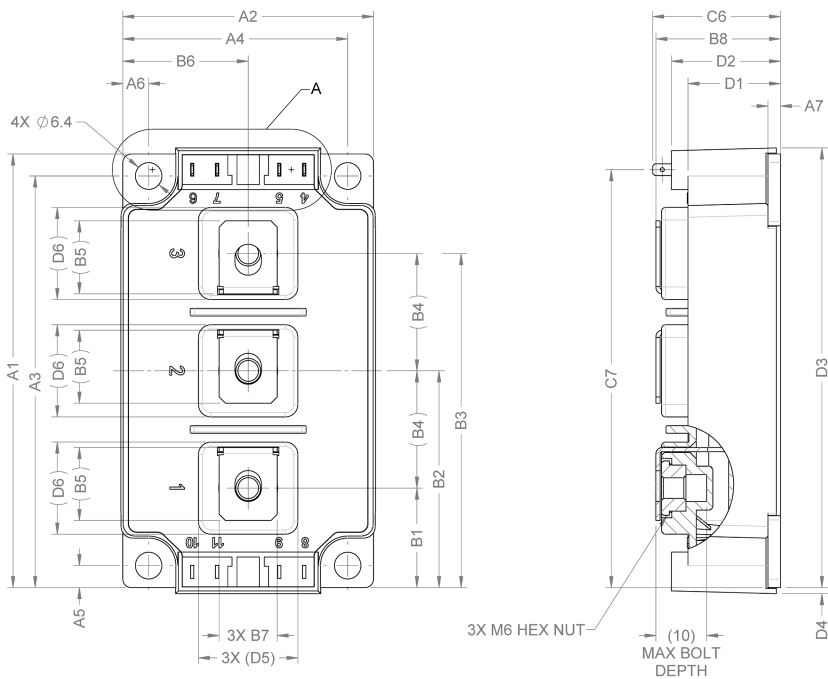

DIMENSION TABLE		
SYMBOL	DIMENSION	TOLERANCE
A1	103.5	±0.30
A2	60.44	±0.30
A3	98.25	±0.30
A4	54.22	±0.30
A5	5.25	±0.30
A6	6.22	±0.30
A7	3	±0.30
B1	23.75	±0.40
B2	51.75	±0.40
B3	79.75	±0.40
B4	(28)	REF.
B5	(17.43)	REF.
B6	30.23	±0.40
B7	(14)	REF.
B8	30.03	±0.40
C1	16.73	±0.40
C2	22.73	±0.40
C3	37.73	±0.40
C4	43.73	±0.40
C5	2.8	±0.40
C6	30.8	±0.50
C7	99.75	±0.40
C8	(6)	REF.
C9	(15)	REF.
D1	22.3	±0.30
D2	26.3	±0.30
D3	104.95	±0.30
D4	1.45	±0.40
D5	(24)	REF.
D6	(22)	REF.

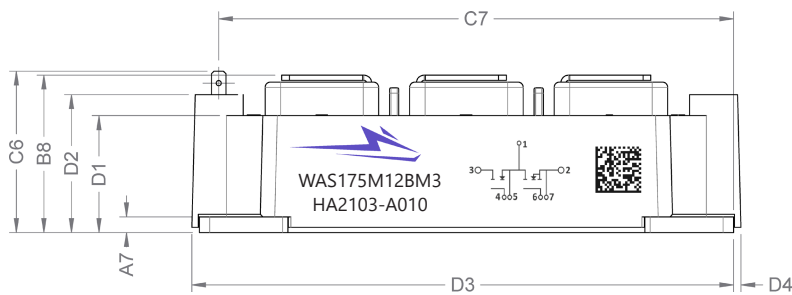



Product Ordering Code

Part Number	Description
WAS175M12BM3	Without Pre-Applied Phase Change Thermal Interface Material
WAS175M12BM3T	With Pre-Applied Phase Change Thermal Interface Material

Supporting Links & Tools

Simulation Tools & Support

- [All LTSpice Models](#)
- [All PLECS Models](#)
- [SpeedFit 2.0 Design Simulator™](#)
- [Technical Support Forum](#)

Compatible Evaluation Hardware

- [CGD1200HB2P-BM3: Dual Channel Differential Isolated Half Bridge Gate Driver Board](#)
- [KIT-CRD-CIL12N-BM: Dynamic Performance Evaluation Board for the BM2 and BM3 Module](#)
- [CGD1700HB2P-BM3: Evaluation Gate Driver Tool Optimized for the 1700 V BM3 Power Modules](#)
- [KIT-CRD-CIL17N-BM: Dynamic Characterization Evaluation Tool Optimized for 1700 V BM Power Modules](#)
- [CGD12HB00D: Differential Transceiver Daughter Board Companion Tool for Differential Gate Drivers](#)

Application Notes

- [PRD-07933: Wolfspeed Power Module Thermal Interface Material Application User Guide](#)
- [PRD-06379: Environmental Considerations for Power Electronics](#)
- [PRD-08710: Measuring Stray Inductance in Power Electronic Systems](#)
- [PRD-07845: Power Module Baseplate Capacitance and Electromagnetic Compatibility](#)
- [PRD-08376: Thermal Characterization Methods and Applications](#)
- [PRD-06933: Capacitance Ratio and Parasitic Turn-On](#)



Notes & Disclaimers

WOLFSPPEED PROVIDES TECHNICAL AND RELIABILITY DATA, DESIGN RESOURCES, APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT THERETO, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfsppeed. No communication from any employee or agent of Wolfsppeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfsppeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfsppeed.

The information contained in this document (excluding examples, as well as figures or values that are labeled as “typical”) constitutes Wolfsppeed’s sole published specifications for the subject product. “Typical” parameters are the average values expected by Wolfsppeed in large quantities and are provided for informational purposes only. Any examples provided herein have not been produced under conditions intended to replicate any specific end use. Product performance can and does vary due to a number of factors.

This product has not been designed or tested for use in, and is not intended for use in, any application in which failure of the product would reasonably be expected to cause death, personal injury, or property damage. For purposes of (but without limiting) the foregoing, this product is not designed, intended, or authorized for use as a critical component in equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment; air traffic control systems; or equipment used in the planning, construction, maintenance, or operation of nuclear facilities. Notwithstanding any application-specific information, guidance, assistance, or support that Wolfsppeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer’s purposes, including without limitation (1) selecting the appropriate Wolfsppeed products for the buyer’s application, (2) designing, validating, and testing the buyer’s application, and (3) ensuring the buyer’s application meets applicable standards and any other legal, regulatory, and safety-related requirements.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfsppeed representative or from the Product Documentation sections of www.wolfsppeed.com.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfsppeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

Contact info:

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfsppeed.com/power

© 2025 Wolfsppeed, Inc. All rights reserved. Wolfsppeed® and the Wolfstreak logo are registered trademarks and the Wolfsppeed logo is a trademark of Wolfsppeed, Inc.
PATENT: <https://www.wolfsppeed.com/legal/patents>

The information in this document is subject to change without notice.